NuPRO-E340

Full-Size PICMG 1.3 Intel® Core™ i7/i5/i3
LGA1155 SHB

User's Manual

Manual Rev.: 2.00

Revision Date: September 1, 2011

Part No: 50-13069-1000

Recycled Paper

Advance Technologies; Automate the World.

Revision History

Revision	Release Date	Description of Change(s)
2.00	2011/09/01	Initial release

Preface

Copyright 2011 ADLINK Technology Inc.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Disclaimer

The information in this document is subject to change without prior notice in order to improve reliability, design, and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

Environmental Responsibility

ADLINK is committed to fulfill its social responsibility to global environmental preservation through compliance with the European Union's Restriction of Hazardous Substances (RoHS) directive and Waste Electrical and Electronic Equipment (WEEE) directive. Environmental protection is a top priority for ADLINK. We have enforced measures to ensure that our products, manufacturing processes, components, and raw materials have as little impact on the environment as possible. When products are at their end of life, our customers are encouraged to dispose of them in accordance with the product disposal and/or recovery programs prescribed by their nation or company.

Trademarks

Product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective companies.

Using this Manual

Audience and Scope

The NuPRO-E340 User's Manual is intended for hardware technicians and systems operators with knowledge of installing, configuring and operating industrial grade single board computers.

Manual Organization

This manual is organized as follows:

Preface: Presents important copyright notifications, disclaimers, trademarks, and associated information on the proper understanding and usage of this document and its associated product(s).

Chapter 1, Introduction: Introduces the NuPRO-E340, its features, applications, and specifications, including functional descriptions and board layout.

Chapter 2, Hardware Information: Provides technical information on connectors and jumpers for configuring the NuPRO-E340.

Chapter 3, Getting Started: Illustrates how to install components on the NuPRO-E340 such as CPU, heatsink, and memory modules.

Chapter 4, Driver Installation: Provides information on how to install the NuPRO-E340 device drivers.

Chapter 5, BIOS Setup: Describes basic navigation for the AMIBIOS®8 BIOS setup utility.

Appendix A, Watchdog Timer: Presents information on implementing the watchdog timer.

Appendix B, System Resources: Presents information on I/O mapping, IRQ routing, and resource allocation.

Important Safety Instructions: Presents safety instructions all users must follow for the proper setup, installation and usage of equipment and/or software.

Getting Service: Contact information for ADLINK's worldwide offices.

Conventions

Take note of the following conventions used throughout this manual to make sure that users perform certain tasks and instructions properly.

NOTE:

Additional information, aids, and tips that help users perform tasks.

CAUTION:

Information to prevent ***minor*** physical injury, component damage, data loss, and/or program corruption when trying to complete a task.

WARNING:

Information to prevent ***serious*** physical injury, component damage, data loss, and/or program corruption when trying to complete a specific task.

This page intentionally left blank.

Table of Contents

Revision History ii

Preface iii

List of Figures xi

List of Tables xiii

1 Introduction 1

1.1 Overview 1
1.2 Features 2
1.3 Specifications 3
1.4 Block Diagram 5
1.5 Functional Description 6
1.6 Mechanical Drawing 9
1.7 I/O Connectivity 10
1.8 Power Consumption 11
1.9 Package Contents 12

2 Hardware Information 13

2.1 Rear Panel I/O Ports 13
2.2 Board Layout 15
2.3 Onboard Connectors 16
2.4 Jumpers 21

3 Getting Started 23

3.1 Installing the CPU 23
3.2 Installing the CPU Fan and Heatsink 27
3.3 Installing Memory Modules 28

4 Driver Installation 31
4.1 Intel® Rapid Storage Technology Driver 31
4.2 Intel® Q67 Express Chipset Driver 32
4.3 Display Driver 32
4.4 Ethernet Driver 33
4.5 Intel® Rapid Storage Technology Utility 33
4.6 Intel® Active Management Technology 33
4.7 TPM Driver 33
4.8 USB 3.0 Driver 34
4.9 Audio Driver 34

5 BIOS Setup 35
5.1 Starting the BIOS 35
5.2 Main Setup 39
5.3 Advanced BIOS Setup 41
5.3.1 ACPI Settings 42
5.3.2 Trusted Computing 43
5.3.3 CPU Configuration 44
5.3.4 SATA Configuration 46
5.3.5 Intel TXT Configuration 47
5.3.6 Intel IGD SWSCI OpRegion 48
5.3.7 USB Configuration 49
5.3.8 Super IO Configuration 51
5.3.9 Hardware Monitor 52
5.3.10 AMT Configuration 54
5.3.11 Serial Port Console Redirection 55
5.4 Chipset Setup 59
5.4.1 Graphics and Memory Bridge Configuration 60
5.4.2 PCH Bridge Configuration 61
5.4.3 Management Engine Subsystem 63
5.5 Boot Configuration 65
5.6 Security Setup 67
5.7 Exit Menu 69

A Appendix: Watchdog Timer 71
A.1 Sample Code 71

B Appendix: System Resources 75
B.1 System Memory Map 75
B.2 Direct Memory Access Channels 75
B.3 IO Map 76
B.4 Interrupt Request (IRQ) Lines 77

Important Safety Instructions 83

Getting Service 85

This page intentionally left blank.

List of Figures

Figure 1-1: NuPRO-E340 Block Diagram 5
Figure 1-2: NuPRO-E340 Board Dimensions 9
Figure 2-1: Rear Panel I/O Ports..... 13
Figure 2-2: Connectors and Jumpers..... 15

This page intentionally left blank.

List of Tables

Table 1-1: NuPRO-E340 General Specifications 3
Table 1-2: NuPRO-E340 I/O Connectivity 10
Table 1-3: Core™ i7-2600 Processor Power Consumption 11
Table B-1: System Memory Map 75
Table B-2: Direct Memory Access Channels 75
Table B-3: IO Map 76
Table B-4: IRQ Lines PIC Mode 77
Table B-5: IRQ Lines APIC Mode 79
Table B-6: PCI Configuration Space Map 81
Table B-7: PCI Interrupt Routing Map 82

This page intentionally left blank.

1 Introduction

1.1 Overview

The ADLINK NuPRO-E340 is a PICMG 1.3 System Host Board (SHB) supporting the next-generation Intel® Core™ i7/i5/i3 and Pentium® processors in LGA1155 package to deliver a scalable high performance platform for a wide array of industrial applications. The NuPRO-E340 supports 32nm process CPUs at up to 3.4 GHz with integrated graphics and memory controllers, Direct Media Interface (DMI) and Flexible Display Interface (FDI) connectivity to the Intel® Q67 Express Chipset. Dual-channel DDR3 1066/1333 MHz memory is supported up to a maximum of 8 GB in two DIMM slots.

These advanced features, coupled with PCI Express® x16 expansion capability, dual PCI Express®-based Gigabit Ethernet, SATA 6 Gb/s and USB 3.0 support make the NuPRO-E340 ideal for vision and automation control applications.

1.2 Features

- Supports Intel® Core™ i7/i5/i3 and Pentium® processors in LGA1155 package
- Integrated Intel® HD Graphics
- PCI Express® x16 expansion capability via backplane
- Dual Gigabit Ethernet
- 2x USB 3.0 ports onboard
- 12x USB 2.0 ports (8x onboard, 4x on backplane)
- 2x SATA 6 Gb/s ports onboard
- 4x SATA 3 Gb/s ports (2x onboard, 2x on backplane)
- 6x COM ports (including 1x RS-232/422/485/485+)
- Watchdog Timer, Hardware Monitor
- Optional HD audio kit (DB-Audio2 daughter board)
- TPM hardware security chip
- RoHS compliant

NOTE:

To purchase the optional DB-Audio2 daughter board, please contact your ADLINK sales representative.

1.3 Specifications

System	
CPU	• Intel® Core™ i7-2600, 3.4 GHz, 8M Cache, 95W TDP • Intel® Core™ i5-2400, 3.1 GHz, 6M Cache, 95W TDP • Intel® Core™ i3-2120, 3.3 GHz, 3M Cache, 65W TDP • Intel® Pentium® G850, 2.9GHz, 3M Cache, 65W TDP
Chipset	• Intel® Q67 Platform Controller Hub
Memory	• Two 240-pin DIMM sockets support dual-channel 1066/1333 MHz DDR3 (up to 8 GB)
BIOS	• AMIBIOS in 64-Mbit SPI Flash
Audio	• Intel® High Definition Audio support via DB-Audio2 daughter board
Watch Dog Timer	• 1-255 second or 1-255 minute programmable and can generate system reset.
Hardware Monitor	• CPU/System temperature, fan speed and onboard DC voltage
TPM	• Infineon SLB 9635 TT 1.2
Operating Systems	• Windows® XP, 7 32/64-bit, • Fedora™ 14 • Red Hat® Enterprise Linux® 5
I/O Interfaces	
I/O Ports	• 2x USB 3.0 port on rear panel • 8x USB 2.0 via onboard header, 4x via backplane • 2x SATA 6 Gb/s ports onboard • 4x SATA 3 Gb/s ports (2x onboard, 2x on backplane) • 6x serial ports via onboard pin-header (5x RS-232, 1x RS-232/422/485/485+) • 2x Gigabit Ethernet RJ45 ports • 1x VGA port (Dsub-15) • 1x DVI-D via onboard pin-header • 1x parallel port
PCIe/PCI	• PCIe-x16, PCIe-x4 and PCI 32bit/33MHz via golden fingers
Graphics	
Integrated	• Integrated Intel® HD Graphics
External	• PCI Express x16

Table 1-1: NuPRO-E340 General Specifications

Ethernet	
Controller	• Dual Gigabit Ethernet (Intel® 82579LM Gigabit Ethernet PHY, Intel® 82574L Gigabit Ethernet Controller) • Supports Preboot Execution Environment (PXE), Wake-On-LAN, and Intel® AMT 7.0 on LAN1 (82579LM)
Ports	• Two RJ-45 Ethernet ports
Mechanical and Environment	
Form Factor	• Standard full-size PICMG 1.3 SHB
Dimensions	• 338 x 126 mm (L x W)
Operating Temp.	• 0ºC to 60ºC
Storage Temp.	• -20ºC to 80ºC
Relative Humidity	• 10% to 90% non-condensing
Safety	• CE, FCC Class A

Table 1-1: NuPRO-E340 General Specifications

1.4 Block Diagram

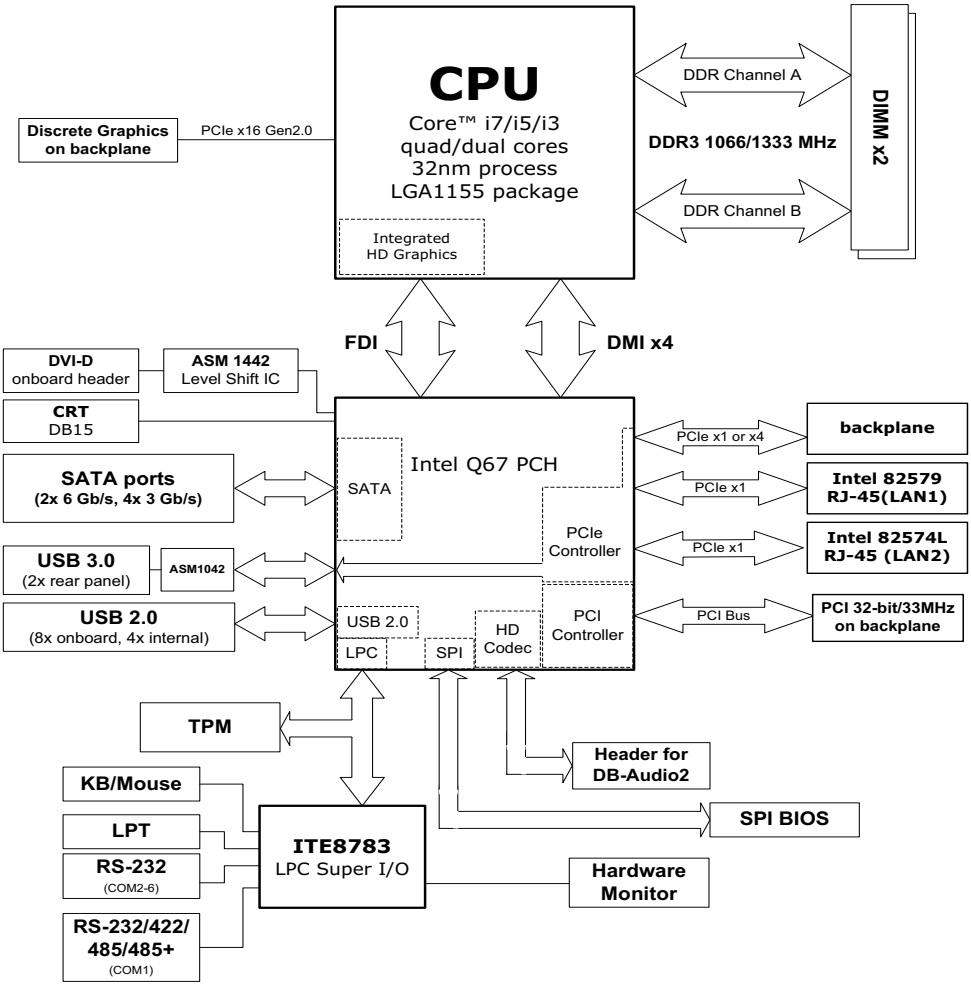

Figure 1-1: NuPRO-E340 Block Diagram

1.5 Functional Description

Processor Support

The NuPRO-E340 is PICMG 1.3 System Host Board supporting the 2nd generation Intel® Core™ processor family (Intel® Core™ i7/i5/i3) in LGA1155 socket. An integrated memory controller supports dual channel 1066/1333 MHz DDR3 and Intel® HD Graphics is integrated onboard the CPU. The CPU provides a PCI Express x16 for external graphics or expansion. Direct Media Interface (DMI) and Flexible Display Interface (FDI) provide connectivity to the Intel® Q67 Express Chipset.

Intel® Q67 Express Chipset

The Intel® BD82Q67 Platform Controller Hub (PCH) combines with the processor to provide a compact yet powerful 2-chip solution. Direct Media Interface (DMI) is the chip-to-chip connection between the processor and PCH. Intel® Flexible Display Interface carries display traffic from the integrated graphics in the processor to the legacy display connectors in the PCH. The PCH supports all other required interfaces including PCI Express, SATA 6 Gb/s, USB 2.0, PCI, LPC, and SPI.

Dual-Channel DDR3 Memory

To meet the requirements of memory-intensive applications, the NuPRO-E340 has a dual-channel memory architecture supporting DDR3 1066/1333 MHz DIMMs. The key advantages of DDR3 are the higher bandwidth and the increase in performance at lower power than DDR2. DDR3 memory technology meets the requirements of the latest 3D graphics, multimedia, and network application, and boosts system performance by eliminating bottlenecks.

Gigabit Ethernet

The NuPRO-E340 utilizes an Intel® 82579LM Gigabit Ethernet PHY and Intel® 82574L Gigabit Ethernet Controller connected to the PCI-E bus of the Q67 PCH. Intel® AMT 7.0 (82579LM on LAN1), Wake-on-LAN and PXE are supported.

Serial ATA

The NuPRO-E340 provides six Serial ATA ports with data transfer rates of up to 6.0 GB/s on 2 ports and up to 3.0 GB/s on 4 ports. Intel® Rapid Storage Technology supports AHCI and RAID 0/1/5/10 functionality.

Universal Serial Bus (USB 2.0/3.0)

The NuPRO-E340 provides 12 USB 2.0 ports supporting transfer rates up to 480 Mb/s and two USB 3.0 ports on the rear panel I/O supporting transfer rates up to 5 Gb/s (ASM1042 controller via PCIe). All ports are USB 2.0/1.1 compatible.

NOTE:

The USB 3.0 ports cannot be used to install Windows as the necessary drivers are currently not included with the OS. Linux kernels 2.6.31 and higher can be installed using the USB 3.0 ports.

Hardware monitoring

A built-in, proactive hardware monitoring system in the Super I/O monitors the CPU temperature, system fan speed, and voltage levels to prevent overheating and/or component damage, effect timely failure detection, and ensure stable supply of current for critical components.

Watchdog Timer

The watchdog timer (WDT) monitors system operations based on user-defined configurations. The WDT can be programmed for different time-out periods, such as from 1 to 255 seconds or from 1 to 255 minutes. The WDT generates a reset signal, then a reset request, after failure to strobe it within the programmed time period. A register bit may be enabled to indicate if the watchdog timer caused the reset event. The WDT register is cleared during the power-on sequence to enable the operating system to take appropriate action when the watchdog generates a reboot.

Trusted Platform Module

The NuPRO-E340 optionally supports TPM ver. 1.2 (Trusted Platform Module) for secure storage of keys, passwords and digital

certificates. Systems supporting TPM offer improved hardware-based security in numerous applications, such as file and folder encryption, local password management, S-MIME e-mail, VPN and PKI authentication and wireless authentication for 802.1x and LEAP.

Intel® Active Management Technology

Intel® Active Management Technology (Intel® AMT) is hardware-based technology for remotely managing and securing PCs out-of-band. Intel® AMT includes hardware-based remote management, security, power-management, and remote-configuration features. Intel® AMT allows remote access to a system when traditional techniques and methods are not available.

1.6 Mechanical Drawing

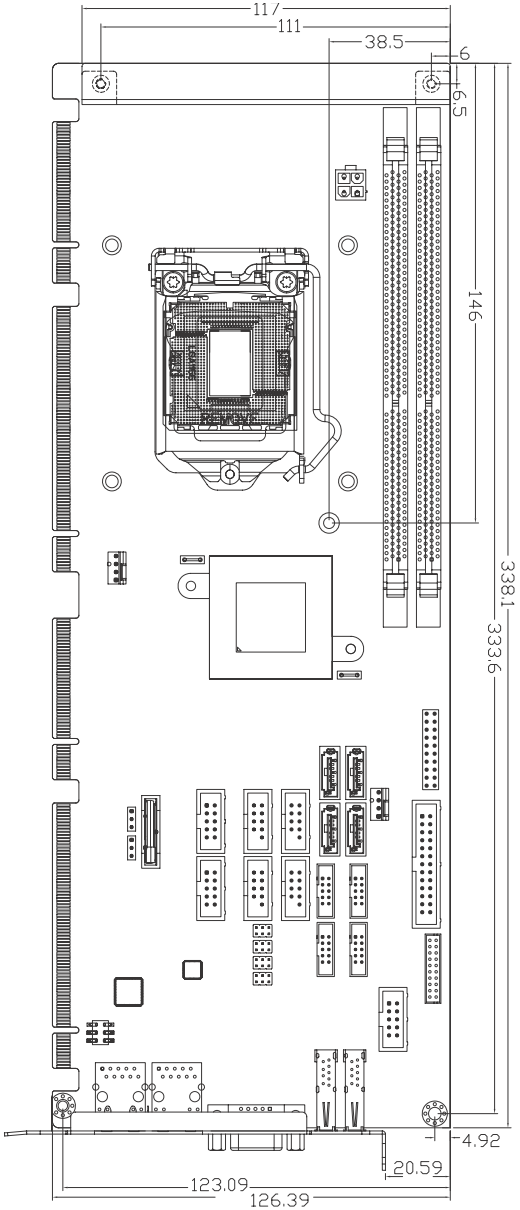

Figure 1-2: NuPRO-E340 Board Dimensions

1.7 I/O Connectivity

I/O	Bracket	Onboard	Golden Finger	Remarks
VGA	Y	—	—	DB-15
DVI-D	—	Y	—	—
LAN1/2 (RJ-45)	Y	—	—	Act/Link/ Speed LEDs
PS/2 KB/MS	—	Y	—	—
USB Rear Panel	2	—	—	USB 3.0
USB headers	—	8	—	2.54” pitch
USB backplane	—	—	4	—
COM1-2	—	Y	—	2.54” pitch
COM3-6	—	Y	—	2.00" pitch
Parallel port	—	Y	—	—
SATA	—	4	2	—
PCIe x4	—	—	Y	—
PCIe x16	—	—	Y	—
PCI 32bit/33MHz	—	—	Y	—

Table 1-2: NuPRO-E340 I/O Connectivity

1.8 Power Consumption

Intel® Core™ i7-2600 Processor (8M Cache, 3.40 GHz)

Test Configuration	
CPU	Intel® Core™ i7-2600 Processor 3.40 GHz (4 cores)
Memory	Unigen 2GB DDR3 1333 UDIMM 240-pin 2x 2GB in 2 DIMM slots
Graphics	Integrated Intel® HD Graphics
SATA Channel 1	Seagate ST9160412AS Barracuda 7200.4 160GB
Power Supply	FSP FSP350-60PFG
Backplane	ADLINK EBP-13E2

DOS (idle)				
Power Req.	+12V	+5V	+3.3V	Total
Current (A)	1.90	1.93	0.86	—
Power (W)	22.8	9.65	2.84	35.3
Windows XP, logon screen (idle)				
Power Req.	+12V	+5V	+3.3V	Total
Current (A)	1.34	1.58	0.86	—
Power (W)	16.1	7.90	2.84	26.8
Windows XP, CPU Stress (BurnIn Test)				
Power Req.	+12V	+5V	+3.3V	Total
Current (A)	6.14	1.99	0.89	—
Power (W)	73.7	9.95	2.94	86.6
Windows XP, Total System Stress (BurnIn Test)				
Power Req.	+12V	+5V	+3.3V	Total
Current (A)	6.80	3.55	1.31	—
Power (W)	81.6	17.8	4.32	103.7

Table 1-3: Core™ i7-2600 Processor Power Consumption

1.9 Package Contents

Before unpacking, check the shipping carton for any damage. If the shipping carton and/or contents are damaged, inform your dealer immediately. Retain the shipping carton and packing materials for inspection. Obtain authorization from the dealer before returning any product to ADLINK.

- NuPRO-E340
- SATA data cable with latch x2
- 2-port USB cable with bracket
- 2-port COM cable with bracket for COM1/COM2 (2.54 mm pitch)
- 2-port COM cable with bracket x2 for COM3-6 (2.0 mm pitch)
- Driver DVD
- User's manual

The NuPRO-E340 must be protected from static discharge and physical shock. Never remove any of the socketed parts except at a static-free workstation. Use the anti-static bag shipped with the product to handle the board. Wear a grounded wrist strap when installing and/or servicing.

2 Hardware Information

This chapter provides information on the NuPRO-E340 board layout, connector pin assignments, and jumper settings.

2.1 Rear Panel I/O Ports

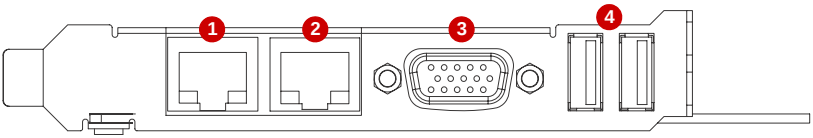

Figure 2-1: Rear Panel I/O Ports

	Connector	Description
1	LAN1 port (RJ-45)	Gigabit Ethernet (supports Intel® AMT)
2	LAN2 port (RJ-45)	Gigabit Ethernet
3	VGA port	DB-15 connector for CRT or LCD monitor
4	USB 3.0 ports	SuperSpeed USB 3.0 ports

USB 3.0 Connectors



Pin #	Signal Name
1	USB3.0_P5VA
2	USB2_CMAN
3	USB2_CMAP
4	GND
5	USB3A_CMRXN
6	USB3A_CMRXP
7	GND
8	USB3A_CMTXN
9	USB3A_CMTXP

NOTE:

The USB 3.0 ports do not function during system boot or under DOS and are only available after the driver is loaded by the OS. For USB support during BIOS setup and system install, connect a USB cable with bracket to one of the onboard USB pin headers.

LAN (RJ-45) Ports



Pin #	10BASE-T/ 100BASE-TX	1000BASE-T
1	TX+	BI_DA+
2	TX-	BI_DA-
3	RX+	BI_DB+
4	--	BI_DC+
5	--	BI_DC-
6	RX-	BI_DB-
7	--	BI_DD+
8	--	BI_DD-

Refer to the table below for the LAN port LED definitions.

LED1		LED2	
Status	**Description**	**Status**	**Description**
Off	No Link	Off	10 Mb connection
On	Linked	Green	100 Mb connection
Blinking	Data Activity	Amber	1 Gb connection

VGA Port



Pin #	Signal	Pin #	Signal
1	Red	9	+5 V
2	Green	10	Ground
3	Blue	11	NC
4	NC	12	DDC DAT
5	Ground	13	HSYNC
6	Ground	14	VSYNC
7	Ground	15	DDC CLK
8	Ground		

2.2 Board Layout

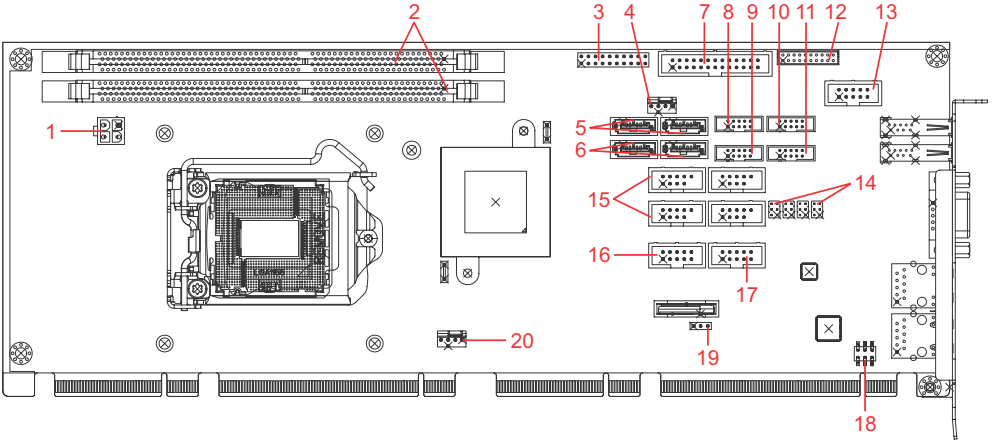

Figure 2-2: Connectors and Jumpers

	Connector	Description
1	CN4	ATX 12V Power connector
2	DIMM1/2	DDR3 DIMM slots
3	CN23	System Panel pin header
4	FAN2	System fan connector
5	CN2/4	SATA 6 Gb/s connectors (blue)
6	CN5/7	SATA 3 Gb/s connectors (black)
7	CN15	Parallel Port connector
8	CN12	COM6 connector
9	CN14	COM5 connector
10	CN13	COM4 connector
11	CN16	COM3 connector
12	CN17	DVI pin header
13	CN11	COM2 connector
14	JP1-4	COM1 mode jumpers
15	CN3/6/8/X1	USB 2.0 pin headers
16	CN9	HD Audio Daughter Board pin header
17	CN10	COM1 connector (RS-232/422/485/485+)
18	CN27	PS/2 Keyboard/Mouse pin header
19	JBAT1	Clear CMOS
20	FAN1	CPU fan connector

2.3 Onboard Connectors

Serial ATA Connectors (CN2/4/5/7)



Pin #	Signal
1	GND
2	TXP
3	TXN
4	GND
5	RXN
6	RXP
7	GND

USB 2.0 Connectors (CN3/6/8/X1)



Pin #	Signal	Pin #	Signal
1	+5V	2	+5V
3	USB0-	4	USB1-
5	USB0+	6	USB1+
7	GND	8	GND
9	Key	10	NC

ATX 12V Power Connector (CN4)



Pin #	Signal
1	GND
2	GND
3	+12V DC
4	+12V DC

HD Audio Daughter Board Connector (CN9)

This connector is designed for use with the ADLINK DB-Audio2 daughter board.



Pin #	Signal	Function
1	GND	Ground
2	AUD_BCLK	Audio Clock
3	GND	Ground
4	ICH_AUD_SDIN1	Audio Data Input
5	P5V	+ 5V
6	ICH_AUD_SDOUT	Audio Data Output
7	P5V_AUD	+ 5V
8	P3V3_DVDD	3.3V
9	AUD_SYNC	Audio Synchronous
10	AUD_RSTJ	Audio Reset

COM2~6 Connector (RS-232) (CN10/11/12/13/14/16)



Pin #	RS-232 Signal
1	DCD
2	DSR
3	RXD
4	RTS
5	TXD
6	CTS
7	DTR
8	RI
9	GND
10	NC

COM1 Connector (RS-422/485/485+) (CN10)



Pin #	RS-422/485+	RS-485
1	TXD-	Data-
2	NC	NC
3	TXD+	Data+
4	NC	NC
5	RXD+	NC
6	NC	NC
7	RXD-	NC
8	NC	NC
9	GND	GND
10	NC	NC

Note: See “COM1 Mode Jumper Settings (JP1-4)” on page 21.

	COM1	COM2	COM3	COM4	COM5	COM6
Connector	CN10	CN11	CN16	CN13	CN14	CN12
Pitch	2.54 mm	2.54 mm	2.00 mm	2.00 mm	2.00 mm	2.00 mm

Parallel Port Connector (CN15)



Pin #	Signal	Pin #	Signal
1	Line Printer Strobe	2	Auto-Feed
3	Parallel Data 0	4	Error
5	Parallel Data 1	6	Initialize
7	Parallel Data 2	8	Select
9	Parallel Data 3	10	Ground
11	Parallel Data 4	12	Ground
13	Parallel Data 5	14	Ground
15	Parallel Data 6	16	Ground
17	Parallel Data 7	18	Ground
19	Acknowledge	20	Ground
21	Busy	22	Ground
23	Paper Empty	24	Ground
25	Select	26	NC

System Panel Connector (CN23)

Connects to chassis-mounted buttons, speakers, and LEDs.



Pin #	Signal	Function	Pin Group
1	WDSPK	Speaker signal	Chassis Speaker
2	NC		
3	NC		
4	+5V	Power	
5	NC		
6	GND	Ground	Key Lock
7	KEYLOCK	Keyboard lock	
8	PLED	Power LED signal	Power LED
9	NC		
10	+5V	Power LED pull-up	
11	GND	Ground	Reset Button
12	RESETBT	RESET signal	
13	NC		
14	GND	Ground	Power Button
15	POWERBT	Power-on signal	
16	NC		
17	NC		
18	HDDLED	Hard Disk LED signal	HDD LED
19	+3.3V	Hard Disk LED pull-up	
20	NC		

Fan Connectors (FAN1/2)



Pin #	Signal
1	GND
2	Fan power (+12V)
3	Fan Tachometer
4	Fan Speed Control

2.4 Jumpers

Clear CMOS (JBAT1)

The CMOS RAM data contains the date / time and BIOS setting information. CMOS is powered by the onboard button cell battery. To erase the CMOS RAM data:

1. Power down and disconnect power from the system.
2. Short pins 2-3 on JP1.
3. Reconnect power and power up the system.
4. After power up, remove the jumper cap from pins 2-3 and reinstall it to pins 1-2.

RTC status	Connection	JBAT1
Normal	1 – 2	
Clear CMOS	2 – 3	

COM1 Mode Jumper Settings (JP1-4)

Short the jumper pins according to the following settings to set COM1 to RS-232/422/485/485+ mode:



	RS-232	RS-422	RS-485	RS-485+
JP1	1-2	3-4	5-6	5-6
JP2	1-3, 2-4	3-5, 4-6	3-5, 4-6	3-5, 4-6
JP3	1-3, 2-4	3-5, 4-6	3-5, 4-6	3-5, 4-6
JP4	–	1-3, 2-4	1-3, 2-4	3-5, 4-6

This page intentionally left blank.

3 Getting Started

This chapter provides information on how to install components on the NuPRO-E340 SHB.

3.1 Installing the CPU

The NuPRO-E340 supports an Intel® Core™ i7/i5/i3 or Pentium® processor in an LGA1155 socket.

WARNING:

Disconnect all power to the board before installing a CPU to prevent damaging the board and CPU.

Do not touch socket contacts. Damaging the contacts voids the product warranty. Follow the installation instructions carefully to avoid damaging the board components.

To install the CPU:

1. Press down on the locking arm (A), then push it away from the socket to disengage it from the retention tab (B).

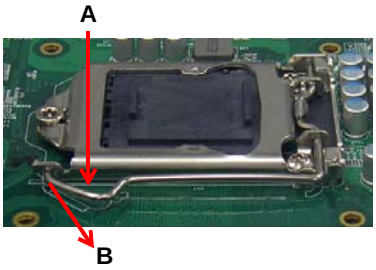

2. Raise the locking arm to unlock the load plate.

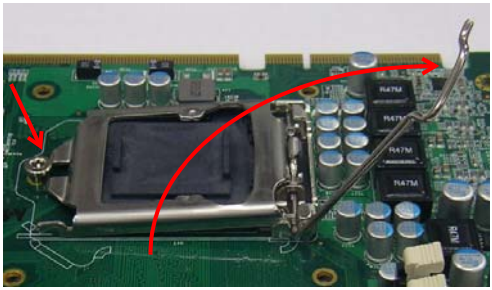

3. Lift the load plate to uncover the socket.

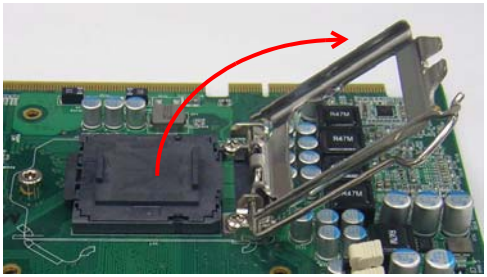

4. Remove the plastic protective cover from the socket. Note the locations of the alignment keys (A) and Pin 1 indicator (B).

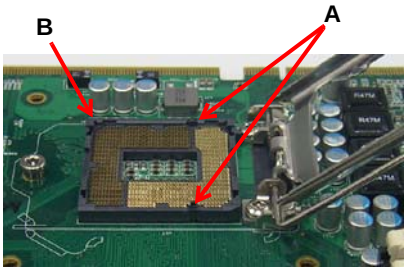

WARNING:

Do NOT touch socket contacts.

5. Hold the CPU using thumb and forefinger as shown. Position the CPU over the socket, matching the notches on the sides of the CPU with the alignment keys on the socket (A). The golden triangle on the CPU must be positioned at the corner of the socket with the Pin 1 indicator as shown (B).

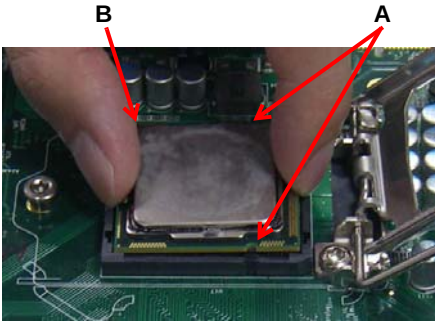

WARNING:

The CPU fits into the socket in only one orientation. DO NOT force it into the socket to avoid causing damage.

6. Carefully place the CPU into the socket vertically. The socket has cutouts for your fingers to fit into.

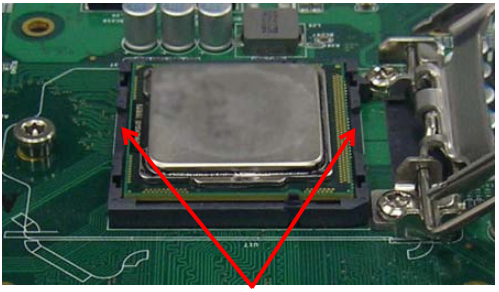

Cutouts

7. Gently lower the load plate. Make sure the front edge of the plate is under the screw as indicated.

8. Lower the locking arm and fasten it to the retention tab (A). The load plate should be locked underneath the screw as shown (B).

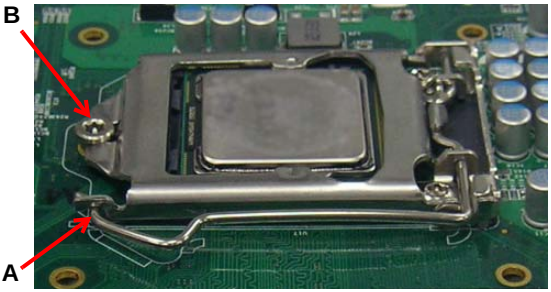

3.2 Installing the CPU Fan and Heatsink

The CPU requires a chassis with an airflow inlet and maximum internal ambient temperature of 50° C. A especially-designed CPU fan and heatsink must be installed before using the SHB. Failure to install a CPU fan and heatsink may damage the system host board and/or the CPU.

When the CPU fan installation procedures presented here are inconsistent with the installation procedures you obtained from the CPU fan and heatsink package, follow the latter.

To install the CPU fan:

1. Apply thermal grease evenly on top of the installed CPU.
2. Lower the CPU fan to the CPU, then secure it using the provided attachments or screws.
3. Connect the CPU fan cable to the CPU fan connector on the SHB labeled FAN1 (see “Board Layout” on page 15).

3.3 Installing Memory Modules

The NuPRO-E340 supports up to 8 GB of DDR3 1066/1333 MHz memory modules in two DIMM sockets. A DDR3 module has a 240-pin footprint compared to the legacy 184-pin DDR DIMM. DDR3 modules are notched to facilitate correct installation in the DIMM sockets.

Disconnect all power to the board before installing a memory module to prevent damaging the board and memory module .

Memory Configuration Options

The NuPRO-E340 supports 1GB, 2GB and 4GB unbuffered non-ECC DDR3 DIMMs in the following configurations:

- Channel A: DIMM1
  Channel B: DIMM2
- For dual-channel configuration, the total size of memory module installed per channel must be the same (DIMM1 = DIMM2).
- It is recommended that you install DIMMs with the same CAS latency. For maximum compatibility, install memory modules with the same brand, model, and/or rating.

To install a memory module:

1. Locate the DIMM sockets on the motherboard.
2. Press the socket's retaining clips outward to unlock.

3. Align the memory module on the socket making sure that the notch matches the break on the socket.

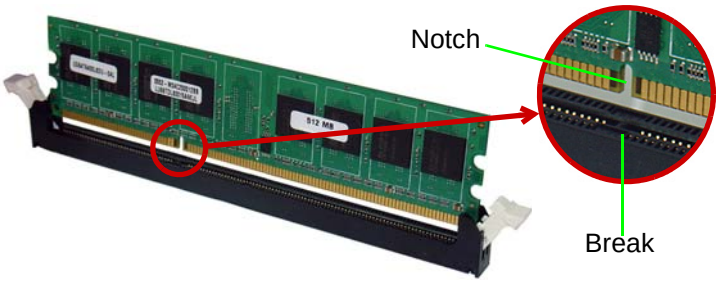

4. Insert the module firmly into the slot until the retaining clips snap back inwards and the module is securely seated.

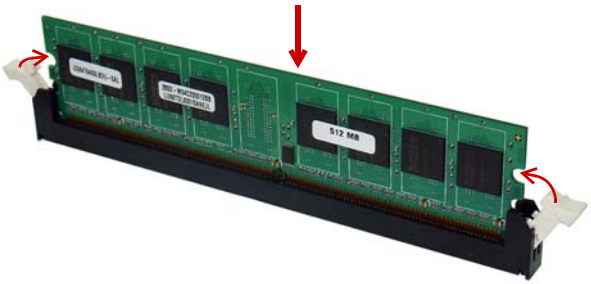

This page intentionally left blank.

4 Driver Installation

This chapter provides information on how to install the NuPRO-E340 device drivers under Windows XP. The device drivers are located in the following ADLINK All-in-One DVD directories:

Chipset	\NuPRO\NuPRO-E340\Chipset\
Display	\NuPRO\NuPRO-E340\VGA\
Ethernet	\NuPRO\NuPRO-E340\Ethernet\
TPM	\NuPRO\NuPRO-E340\TPM\
.Net Framework	\NuPRO\NuPRO-E340\VGA\
Rapid Storage	\NuPRO\NuPRO-E340\Others\
USB 3.0	\NuPRO\NuPRO-E340\Others\
Audio	\Audio Daughter Board\DB-Audio2\

Install the Windows operating system before installing any driver. Most standard I/O device drivers are installed during Windows installation.

NOTE:

The USB 3.0 ports cannot be used to install Windows as the necessary drivers are currently not included with the OS. Linux kernels 2.6.31 and higher can be installed using the USB 3.0 ports.

NOTE:

In order to enable RAID or AHCI mode, you must pre-install the Intel® Rapid Storage Technology driver during the Windows* installation process. using the F6 installation method.
*Not required for Windows Vista and Windows 7.

4.1 Intel® Rapid Storage Technology Driver

1. Create a floppy image as described in the F6Readme.txt file contained in **X:\NuPRO\NuPRO-E340\Others\ F6_SATA_Floppy_Install_Image_WinXP32_WinVISTA32_ IRST 9.5.0.1037.zip**.
2. During Windows installation, press **F6** when you see the message "*Press F6 if you need to install a third party SCSI or RAID driver.*" Then press **S** to *Specify Additional Device*.

3. Insert the floppy disk and follow the remaining instructions. Leave the disk in until the system has rebooted and copied the necessary files, then remove the disk.

4.2 Intel® Q67 Express Chipset Driver

This section describes the installation of the Intel® Q67 Express chipset driver.

1. Locate the directory **X:\NuPRO\NuPRO-E340\Chipset** on the ADLINK All-in-One DVD, and extract the file **setup.exe** from the following archive: **Chipset driver_ Intel_INF_Update_Utility_All_WinOS.zip**.
2. Run the program **setup.exe** and follow the onscreen instructions. Restart the system if prompted.

4.3 Display Driver

Integrated Intel® HD Graphics

This section describes the driver installation for the Integrated Intel® HD Graphics.

Follow these instructions to install the display driver:

1. Locate the directory **X:\NuPRO\NuPRO-E340\VGA** on the ADLINK All-in-One DVD, and extract the contents of the following archive: **Microsoft_Net_Framework_v3.5_SP1.zip**
2. Run the program **Microsoft_Net_Framework_v3.5_SP1.exe** and follow the onscreen instructions.Restart the system if prompted.
3. Locate the directory **X:\NuPRO\NuPRO-E340\VGA** on the ADLINK All-in-One DVD, and extract the file **setup.exe** from the following archive: **VGA_winxp.zip**.
4. Run the program **setup.exe** and follow the onscreen instructions. Restart the system if prompted.

4.4 Ethernet Driver

Follow these instructions to install the Ethernet driver.

1. Locate the directory **X:\NuPRO\NuPRO-E340\Ethernet** on the ADLINK All-in-One DVD, and extract the file **Autorun.exe** from the following archive: **Network_driver_Intel_Network_Adapter_For_Win32.zip**.
2. Run the program **Autorun.exe** and follow the onscreen instructions. Restart the system if prompted.

4.5 Intel® Rapid Storage Technology Utility

Follow these instructions to install the Intel® Rapid Storage Technology utility.

1. Locate the directory **X:\NuPRO\NuPRO-E340\Others** on the ADLINK All-in-One DVD, and extract the file **setup.exe** from the following archive: **Intel_Rapid_Storage_Technology_All_WinOS_v9.5.0.1037.zip**.
2. Run the program **setup.exe** and follow the onscreen instructions. Restart the system if prompted.

4.6 Intel® Active Management Technology

Follow these instructions to install the Intel® Active Management Technology driver.

1. Locate the directory **X:\NuPRO\NuPRO-E340\Others** on the ADLINK All-in-One DVD, and extract the file **setup.exe** from the following archive: **ME_SW.zip**.
2. Run the program **setup.exe** and follow the onscreen instructions. Restart the system if prompted.

4.7 TPM Driver

Follow these instructions to install the TPM driver.

1. Locate the directory **X:\NuPRO\NuPRO-E340\TPM** on the ADLINK

All-in-One DVD, and extract the file **setup.exe** from the following archive: **TPM_HostSW_3.7_IFX_RTM.zip**.

2. Run the program **setup.exe** and follow the onscreen instructions. Restart the system if prompted.

4.8 USB 3.0 Driver

Follow these instructions to install the TPM driver.

1. Locate the directory **X:\NuPRO\NuPRO-E340\Others** on the ADLINK All-in-One DVD, and extract the file **setup.exe** from the following archive: **USB3.0.zip**.
2. Run the program **setup.exe** and follow the onscreen instructions. Restart the system if prompted.

4.9 Audio Driver

Follow these instructions to install the audio driver for the optional DB-Audio2 daughter board.

Before installing the audio driver, check the BIOS settings to make sure that audio is enabled: **Chipset > PCH Configuration > HDA Controller** (see “PCH Bridge Configuration” on page 61).

1. Place the ADLINK All-in-One DVD to the optical drive.
2. Locate the audio driver from the directory **X:\Audio Daughter Board\DB-Audio2**, then double-click on the **setup.exe** file to start installation.
3. Follow the screen instructions to complete installation, then restart the system if prompted.

5 BIOS Setup

The following chapter describes basic navigation for the AMIBIOS® EFI BIOS setup utility.

5.1 Starting the BIOS

To enter the setup screen, follow these steps:

1. Power on the motherboard
2. Press the < Delete > key on your keyboard when you see the following text prompt:
   < Press DEL to run Setup >
3. After you press the < Delete > key, the main BIOS setup menu displays. You can access the other setup screens from the main BIOS setup menu, such as Chipset and Power menus.

American Megatrends
www.ami.com
Version 2.00.1201. Copyright (C) 2009 American Megatrends, Inc.
Press <DEL> or <F2> to enter setup, Press F7 for BBS POPup Menu.
A3

Note: In most cases, the < Delete > key is used to invoke the setup screen. There are several cases that use other keys, such as < F1 >, < F2 >, and so on.

Setup Menu

The main BIOS setup menu is the first screen that you can navigate. Each main BIOS setup menu option is described in this user's guide.

The Main BIOS setup menu screen has two main frames. The left frame displays all the options that can be configured. "Grayed" options cannot be configured, "Blue" options can be.

The right frame displays the key legend. Above the key legend is an area reserved for a text message. When an option is selected in the left frame, it is highlighted in white. Often a text message will accompany it.

Navigation

The BIOS setup/utility uses a key-based navigation system called hot keys. Most of the BIOS setup utility hot keys can be used at any time during the setup navigation process.

These keys include < F1 >, < F10 >, < Enter >, < ESC >, < Arrow > keys, and so on. .

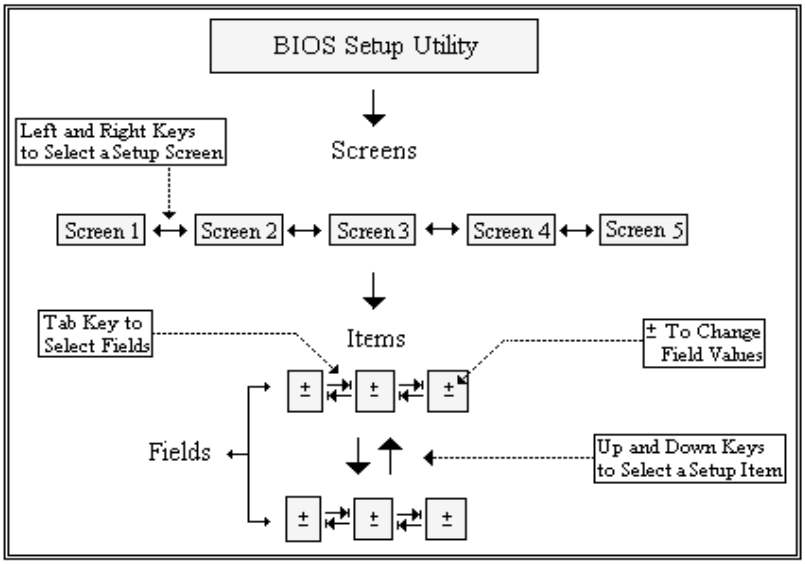

Note: There is a hot key legend located in the right frame on most setup screens.

The < F8 > key on your keyboard is the Fail-Safe key. It is not displayed on the key legend by default. To set the Fail-Safe settings of the BIOS, press the < F8 > key on your keyboard. It is located on the upper row of a standard 101 keyboard. The Fail-Safe settings allow the motherboard to boot up with the least amount of options set. This can lessen the probability of conflicting settings.

Hotkey Descriptions

F1 The < F1 > key allows you to display the General Help screen.

Press the < F1 > key to open the General Help screen.

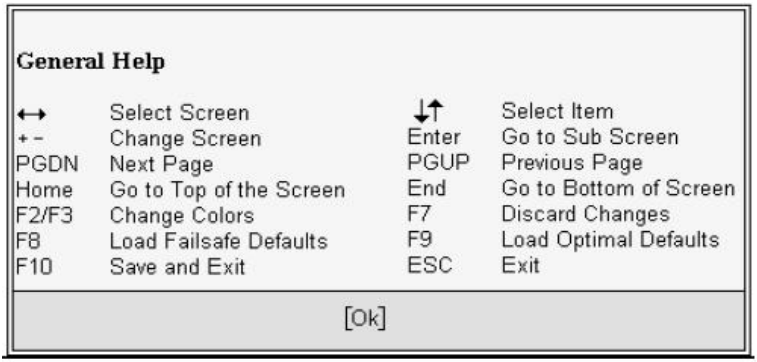

F10 The < F10 > key allows you to save any changes you have made and exit Setup. Press the < F10 > key to save your changes. The following screen will appear:

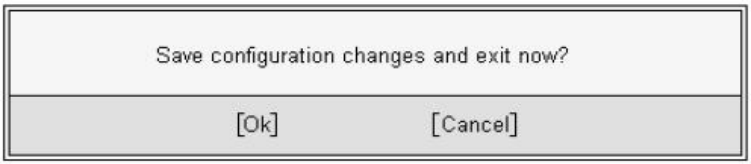

Press the < Enter > key to save the configuration and exit. You can also use the < Arrow > key to select Cancel and then press the < Enter > key to abort this function and return to the previous screen.

ESC The < Esc > key allows you to discard any changes you have made and exit the Setup. Press the < Esc > key to exit the setup without saving your changes. The following screen will appear:

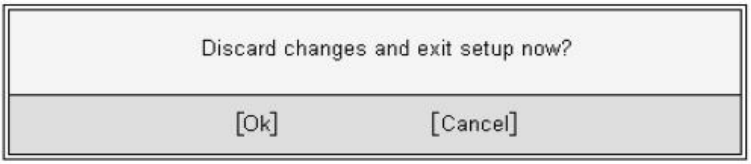

Press the < Enter > key to discard changes and exit. You can also use the < Arrow > key to select Cancel and then press the < Enter > key to abort this function and return to the previous screen.

Enter The < Enter > key allows you to display or change the setup option listed for a particular setup item. The < Enter > key can also allow you to display the setup sub-screens.

5.2 Main Setup

When you first enter the Setup Utility, you will enter the Main setup screen. You can always return to the Main setup screen by selecting the Main tab. There are two Main Setup options. They are described in this section. The Main BIOS Setup screen is shown below.

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main Advanced Chipset Boot Security Save & Exit
BIOS Information
BIOS Vendor American Megatrends
Core Version 4.6.4.0
Compliency UEFI 2.0
Project Version NE340 REV:A1.2 x64
Build Date and Time 07/22/2011 17:07:23
Memory Information
Total Memory 1024 MB (DDR3 1333)
System Date [Sat 01/01/2005]
System Time [01:15:55]
Access Level Administrator
Set the Date. Use Tab to switch between Data elements.
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

System & Board Info

BIOS Vendor

Displays the BIOS vendor.

Core Version

Displays the BIOS core version.

Compliancy

Displays the current BIOS compliancy.

Project Version

Displays the current BIOS revision.

Build Date and Time

Displays the BIOS build data.

System Time/System Date

Use this option to change the system time and date. Highlight System Time or System Date using the < Arrow > keys. Enter new values using the keyboard. Press the < Tab > key or the < Arrow > keys to move between fields. The date must be entered in MM/DD/YY format. The time is entered in HH:MM:SS format.

Note: The time is in 24-hour format. For example, 5:30 A.M. appears as 05:30:00, and 5:30 P.M. as 17:30:00.

Access Level

Displays the current system access level.

5.3 Advanced BIOS Setup

Select the Advanced tab from the setup screen to enter the Advanced BIOS Setup screen. You can select any of the items in the left frame of the screen, such as SuperIO Configuration, to go to the sub menu for that item. You can display an Advanced BIOS Setup option by highlighting it using the < Arrow > keys. The Advanced BIOS Setup screen is shown below.

The sub menus are described on the following pages.

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main Advanced Chipset Boot Security Save & Exit
Legacy OpROM Support
Launch PXE OpROM [Disabled]
> ACPI Settings
> Trusted Computing
> CPU Configuration
> SATA Configuration
> Intel TXT(LT) Configuation
> Intel IGD SWSCI OpRegion
> USB Configuration
> Super IO Configuration
> H/W Monitor
> AMT Configuration
> Serial Port Console Redirection
Enable or Disable Boot Option for Legacy Network Devices.
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

Launch PXE OpROM

Boot Option for Legacy Network Devices. Options: Enabled/ Disabled.

5.3.1 ACPI Settings

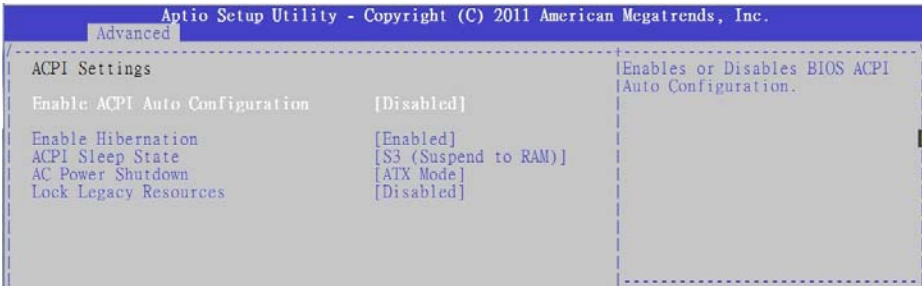
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
ACPI Settings
Enable ACPI Auto Configuration [Disabled]
Enable Hibernation [Enabled]
ACPI Sleep State [S3 (Suspend to RAM)]
AC Power Shutdown [ATX Mode]
Lock Legacy Resources [Disabled]
Enables or Disables BIOS ACPI Auto Configuration.

Enable APIC Auto Configuration

BIOS ACPI Auto Configuration. Options: Enabled/Disabled.

Enable Hibernation

Enable or disable the system's ability to hibernate (S4 sleep state). This option may be not effective with some OS's.

ACPI Sleep State

Select the highest ACPI sleep state the system will enter, when the SUSPEND button is pressed. Options: S1, S3, Suspend Disable.

AC Power Shutdown

ATX mode: OS will turn off system power when shutdown.
AT mode: OS show It is now safe to turn off your computer.

NOTE: AT mode will not support S3 & S4.

Lock Legacy Resources

Enable or disable Lock of Legacy Resources.

5.3.2 Trusted Computing

Trusted computing is an industry standard to make personal computers more secure through a dedicated hardware chip, called a Trusted Platform Module (TPM).

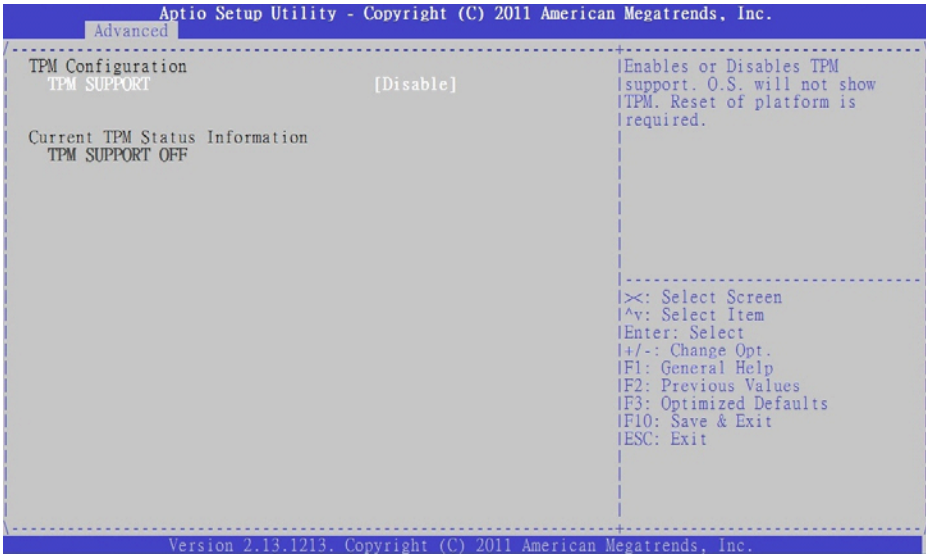
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
TPM Configuration
TPM SUPPORT [Disable]
Current TPM Status Information
TPM SUPPORT OFF
Enables or Disables TPM support. O.S. will not show TPM. Reset of platform is required.
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

TPM Support

This option enables or disables the TPM support. System reset is required. Options: Enabled/Disabled.

TPM State

Determine whether TPM state change requires Password Authentication. Options: Enabled/Disabled.

Pending TPM Operation

Scheduled TPM operation. The settings for this value are Enable, Disable and Clear.

5.3.3 CPU Configuration

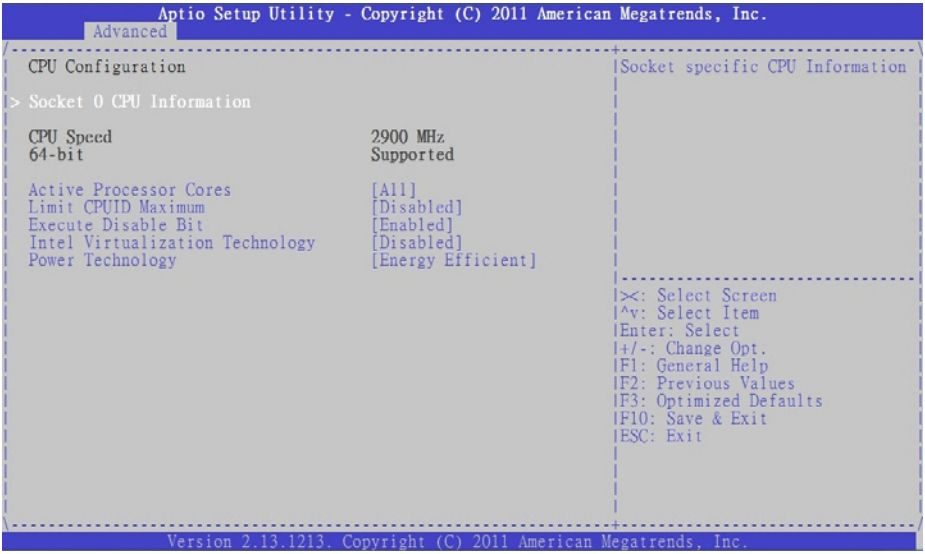

Active Processor Cores

Number of cores to enable in processor. Options: All, 1, 2.

Limit CPUID Value Maximum

When Enabled, the processor will limit the maximum CPUID input value to 03h when queried, even if the processor supports a higher CPUID input value. When Disabled, the processor will return the actual maximum CPUID input value of the processor when queried. Enable this option to allow compatibility with older operating systems.

Execute Disable Bit

Allows you to enable or disable the No-Execution Page Protection Technology. Setting this item to [Disabled] forces the XD feature flag to always return a zero (0). Options: Enabled, Disabled.

Intel® Virtualization Tech

When enabled, Intel® Virtualization Technology (Intel® VT) makes a single system appear as multiple independent systems to software. This allows for multiple, independent operating systems to be running simultaneously on a single system.

Power Technology

Sets the power management features. Options: Disable, Energy Efficient, Custom.

Socket 0 CPU Information

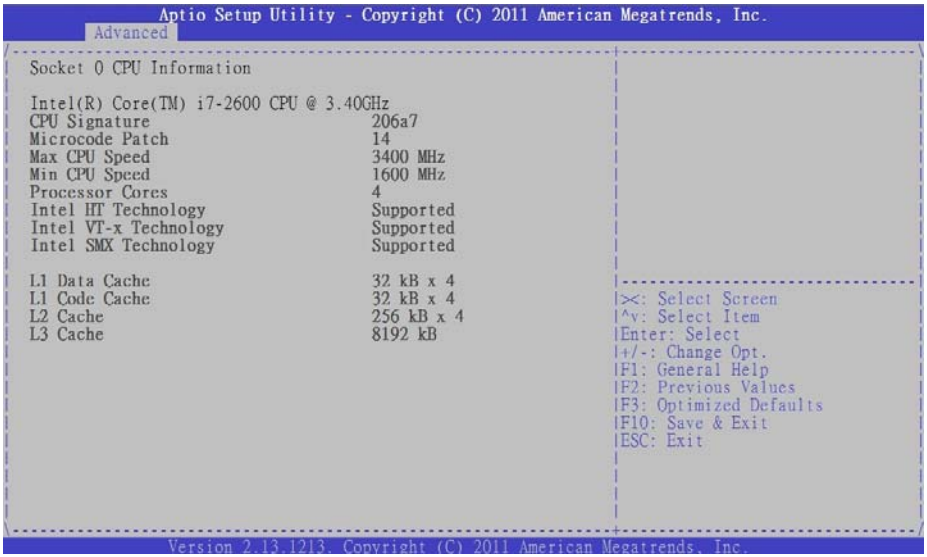
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
Socket 0 CPU Information
Intel(R) Core(TM) i7-2600 CPU @ 3.40GHz
CPU Signature 206a7
Microcode Patch 14
Max CPU Speed 3400 MHz
Min CPU Speed 1600 MHz
Processor Cores 4
Intel HT Technology Supported
Intel VT-x Technology Supported
Intel SMX Technology Supported
L1 Data Cache 32 kB x 4
L1 Code Cache 32 kB x 4
L2 Cache 256 kB x 4
L3 Cache 8192 kB
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

5.3.4 SATA Configuration

SATA Mode

Options: IDE, RAID, AHCI.

Serial ATA Controller 0/1

Appears when SATA mode is set to IDE. This item specifies whether Serial ATA Controller 0/1 is initialized in Compatible or Enhanced mode of operation. The settings are Disabled, Compatible and Enhanced.

Aggressive Link Power Management

Appears when SATA mode is set to AHCI. The settings are Disabled and Enabled.

SATA Port 0~5

The **Staggered Spin-up**, **External SATA Port (eSATA)** and **Hot Plug** options appear when SATA Mode is set to AHCI. Options: Enabled/Disabled.

5.3.5 Intel TXT Configuration

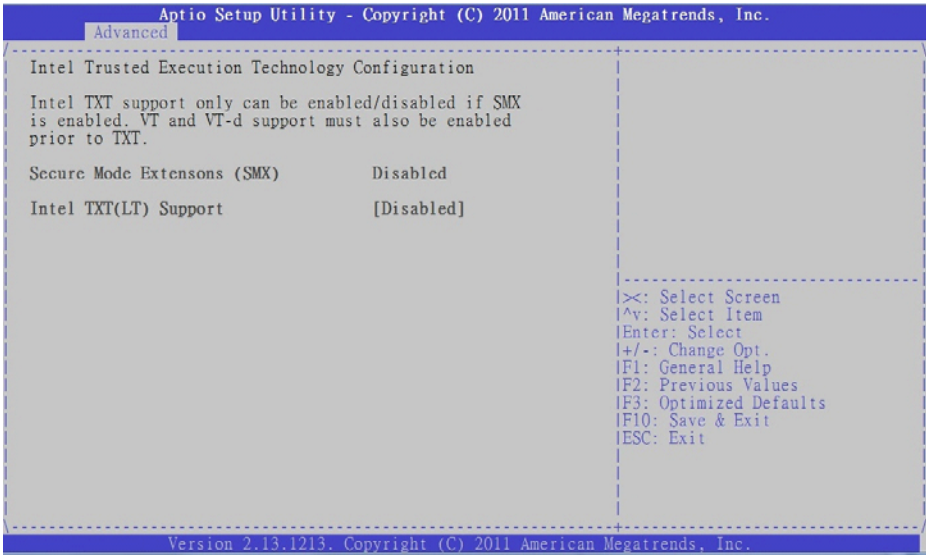
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
Intel Trusted Execution Technology Configuration
Intel TXT support only can be enabled/disabled if SMX is enabled. VT and VT-d support must also be enabled prior to TXT.
Secure Mode Extensons (SMX) Disabled
Intel TXT(LT) Support [Disabled]
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

Intel Trusted Execution Technology (Intel TXT) support can only be enabled when TPM is enabled, if the CPU supports Safer Mode Extensions (SMX), and Intel® Virtualization Technology (Intel® VT) and Intel® Virtualization Technology for Directed I/O (VT-d) are enabled.

5.3.6 Intel IGD SWSCI OpRegion

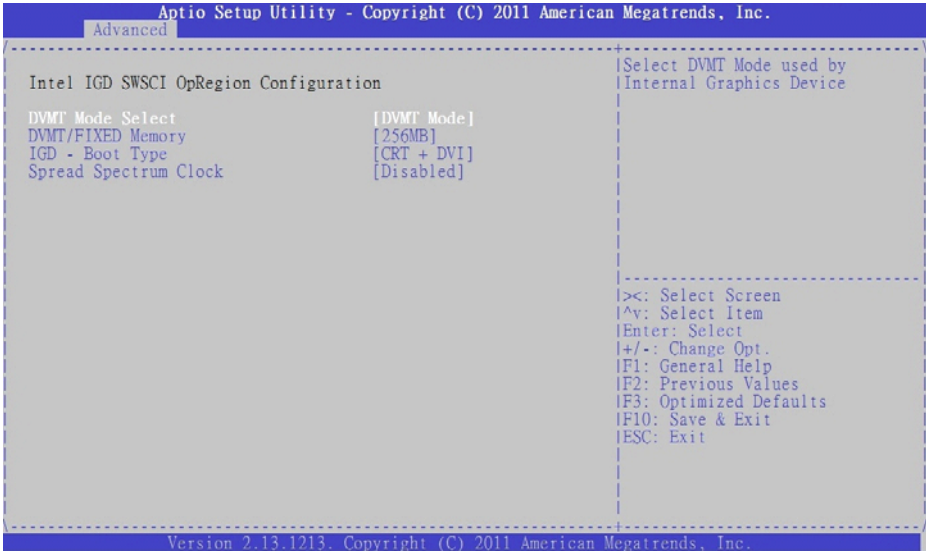
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
Intel IGD SWSCI OpRegion Configuration
DVMT Mode Select [DVMT Mode]
DVMT/FIXED Memory [256MB]
IGD - Boot Type [CRT + DVI]
Spread Spectrum Clock [Disabled]
Select DVMT Mode used by Internal Graphics Device
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

DVMT Mode

This item allows the user to enable or disable the DVMT function.

DVMT/Fixed Memory

Select DVMT/Fixed memory size used by the Integrated Graphics Device. Options: 128MB, 256MB, Maximum.

IGD - Boot Type

Select the video device which will be activated during POST. This has no effect if an external graphics device is present. Options: CRT+DVI, CRT, DVI.

Spread Spectrum Clock

IGD device spread spectrum clock function. Options: Enabled/ Disabled.

5.3.7 USB Configuration

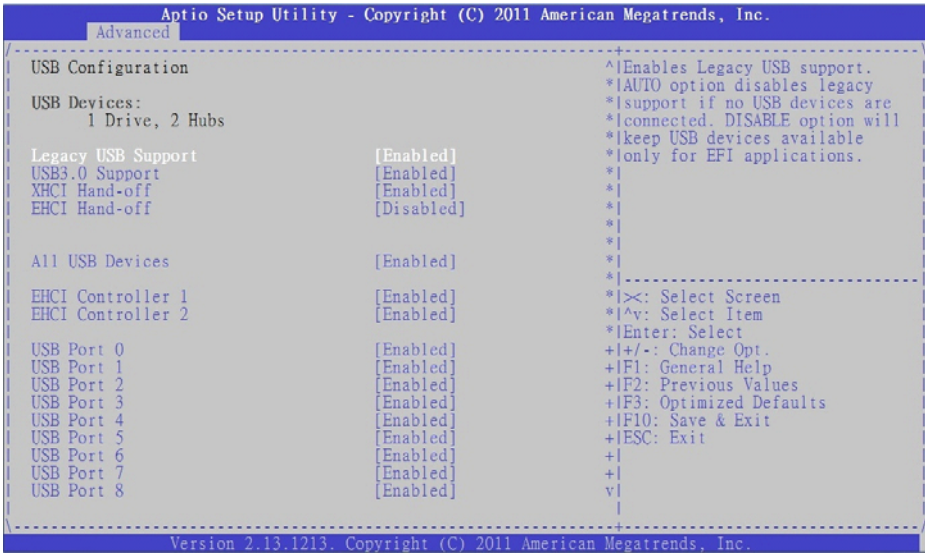

Legacy USB Support

Legacy USB Support refers to USB mouse and keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard will not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there are no USB drivers loaded on the system. Set this value to enable or disable the Legacy USB Support.

- **Disabled:** Set this value to prevent the use of any USB device in DOS or during system boot.
- **Enabled:** Set this value to allow the use of USB devices during boot and while using DOS.
- **Auto:** This option auto detects USB Keyboards or Mice and if found, allows them to be utilized during boot and while using DOS.

USB 3.0 Support

USB 3.0 Controller support. Options: Enable, Disable.

XHCI Hand-Off

This is a workaround for OSes without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver. Options: Enable, Disable.

EHCI Hand-Off

This is a workaround for OSes without EHCI hand-off support. The EHCI ownership change should be claimed by EHCI driver. Options: Enable, Disable.

All USB Devices

Enabled/Disabled All USB devices. Options: Enable, Disable.

EHCI Controller 1/2

Enabled/Disabled USB 2.0 (EHCI) Support. Options: Enable, Disable.

USB Port 0~13

Enabled/Disabled USB Port 0~13. Options: Enable, Disable.

Mass Storage Devices:

Mass storage device emulation type. 'AUTO' enumerates devices according to their media format. Optical drives are emulated as 'CDROM', drives with no media will be emulated according to a drive type. Options: Auto, Floppy, Forced FDD, Hard Disk, CD-ROM.

5.3.8 Super IO Configuration

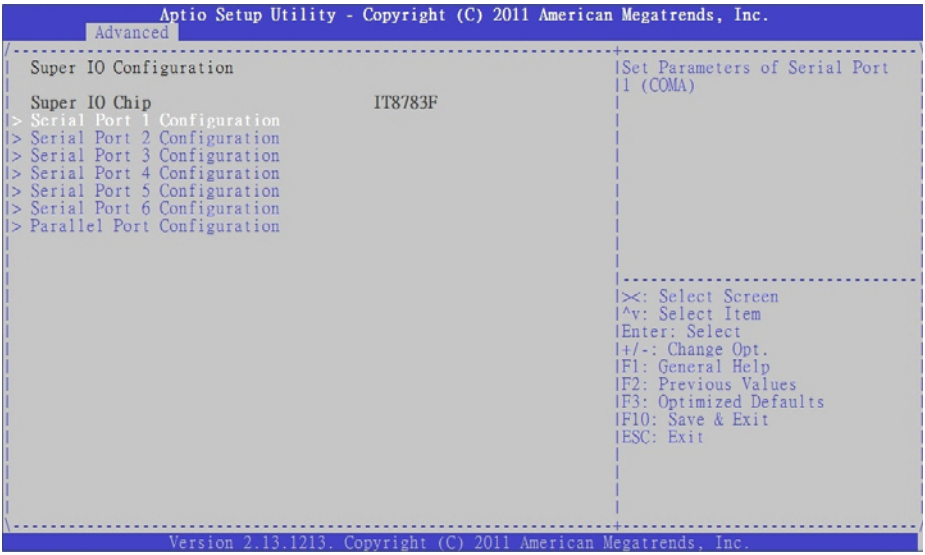
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
Super IO Configuration
Super IO Chip IT8783F
> Serial Port 1 Configuration
> Serial Port 2 Configuration
> Serial Port 3 Configuration
> Serial Port 4 Configuration
> Serial Port 5 Configuration
> Serial Port 6 Configuration
> Parallel Port Configuration
Set Parameters of Serial Port 1 (COMA)
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

Serial Port1-6 Configuration

Enter the submenu for each serial port to enable/disable and view the I/O port and IRQ settings.

Parallel Port Configuration

Enter the submenu to enable/disable the parallel port and specify the base I/O port address.

5.3.9 Hardware Monitor

You can use this screen to view System Status information and to select options for FAN1 settings (FAN2 is set to *Full On* by default).

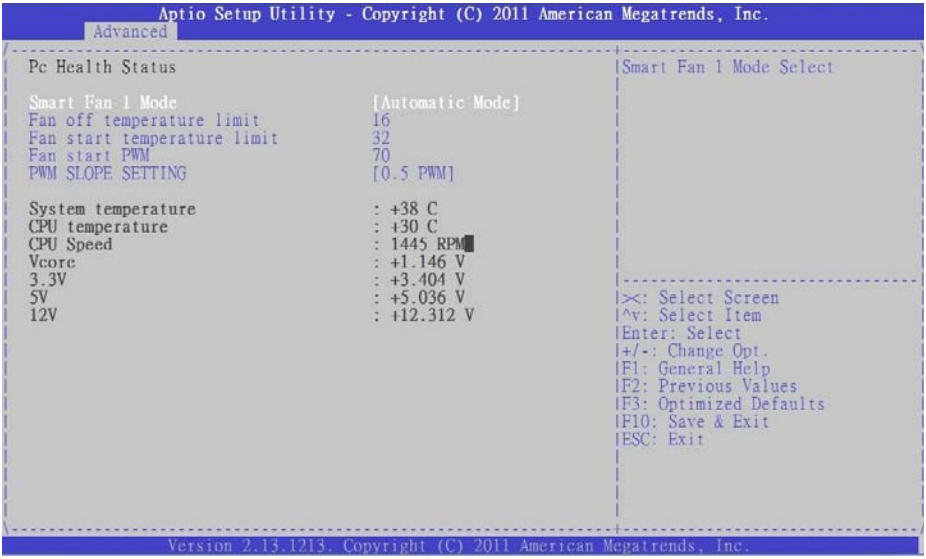
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
Pc Health Status
Smart Fan 1 Mode [Automatic Mode]
Fan off temperature limit 16
Fan start temperature limit 32
Fan start PWM 70
PWM SLOPE SETTING [0.5 PWM]
System temperature : +38 C
CPU temperature : +30 C
CPU Speed : 1445 RPM
Vcore : +1.146 V
3.3V : +3.404 V
5V : +5.036 V
12V : +12.312 V
Smart Fan 1 Mode Select
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

Smart Fan 1 Mode Setting

Three operating modes are provided for FAN1: **Full Mode**, **Automatic Mode**, and **Manual Mode**. Full Mode runs the fan at full speed. Automatic Mode is *Smart Fan* mode. Manual Mode runs the fan at the set speed (minimum is 0, maximum is 127).

Automatic Mode

In Automatic Mode, the following settings are visible.

Fan Off Temperature Limit

Sets the temperature below which the fan will turn off in degrees Celsius (°C). When the temperature is higher than the set value, FAN1 will run at Fan Start PWM speed. When the temperature is lower than the set value, FAN1 will stop.

Fan Start Temperature Limit

When the temperature in degrees (°C) is higher than the set value, FAN1 will increase its speed according to the PWM Slope Setting value.

Fan Start PWM

Sets the PWM value of the fan between **Fan Off Temperature Limit** and **Fan Start Temperature Limit**. Minimum value is 0 and maximum is 127.

PWMSlope Setting

The Slope PWM Value sets the rate of increase the fan speed when the temperature is above **Fan Start Temperature Limit**.

System Status

System temperature, CPU temperature and fan speed (FAN1), system voltages.

5.3.10 AMT Configuration

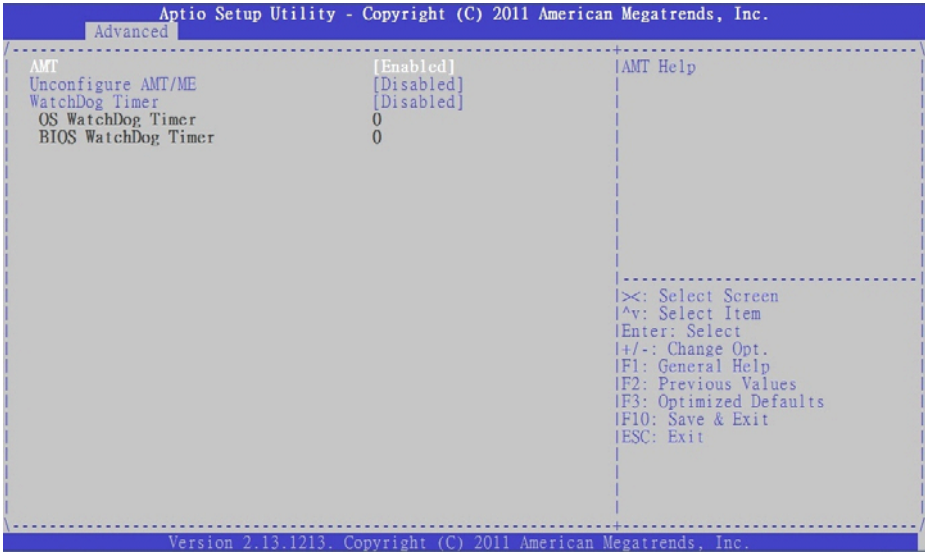

AMT

This item allows the user to Enable/Disable the Intel AMT function.

Unconfigure AMT/ME

This item allows the user to unprovision the AMT/ME function without a password.

WatchDog Timer

Options: Enabled/Disabled.

OS WatchDog Timer

Sets the OS WatchDog Timer (seconds).

BIOS WatchDog Timer

Sets the BIOS WatchDog Timer (seconds).

5.3.11 Serial Port Console Redirection

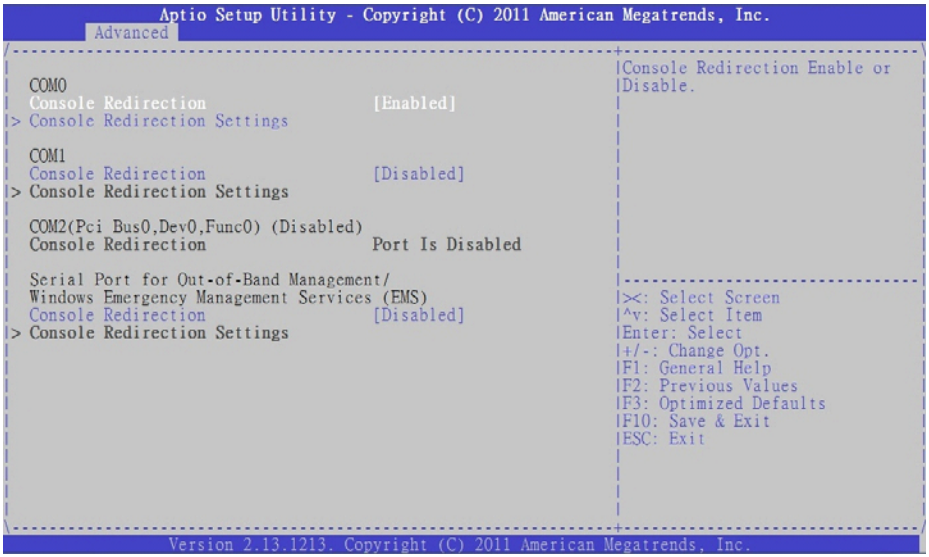

COM0/1 Console Redirection

Options: Enabled/Disabled.

Console Redirection Settings

The settings specify how the host computer and the remote computer exchange data. Both computers should have the same or compatible settings.

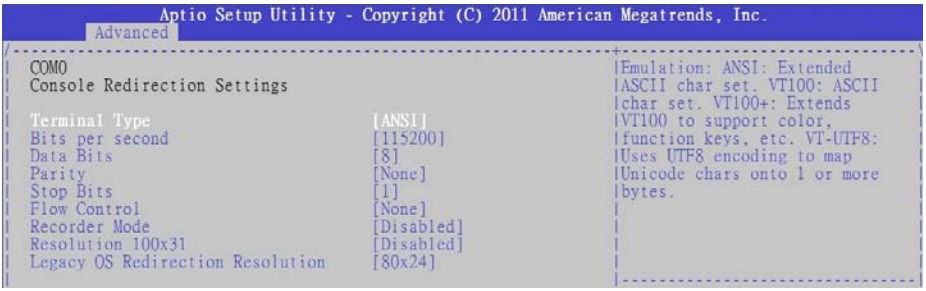
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
COM0
Console Redirection Settings
Terminal Type [ANSI]
Bits per second [115200]
Data Bits [8]
Parity [None]
Stop Bits [1]
Flow Control [None]
Recorder Mode [Disabled]
Resolution 100x31 [Disabled]
Legacy OS Redirection Resolution [80x24]
Emulation: ANSI: Extended ASCII char set. VT100: ASCII char set. VT100+: Extends VT100 to support color, function keys, etc. VT-UTF8: Uses UTF8 encoding to map Unicode chars onto 1 or more bytes.

Terminal Type

This option is used to select either VT100/VT-UTF8 or ANSI terminal type. Options: VT100, VT100+, VT-UTF8, ASNI.

Bits per second

Select the bits per second you want the serial port to use for console redirection. The options are 115200, 57600, 38400, 19200, 9600.

Data Bits

Select the data bits you want the serial port to use for console redirection. Set this value to 7 and 8.

Parity

Set this option to select Parity for console redirection. The settings for this value are None, Even, Odd, Mark and Space.

Stop Bits

Stop bits indicate the end of a serial data packet. (A start bit indicates the beginning). The standard setting is 1 stop bit. Communication with slow devices may require more than 1 stop bit. Set this value to 1 and 2.

Flow Control

Set this option to select Flow Control for console redirection. The settings for this value are None, Hardware RTS/CTS.

Record Mode

With this mode enabled only text will be sent., allowing capture of Terminal data. Set this value to Enabled or Disabled.

Resolution 100x31

Enable or disable extended terminal resolution. Set this value to Enabled or Disabled.

Legacy OS Redirection Resolution

On a legacy OS, the number of Rows and Columns supported by redirection. Set this value to 80x24 and 80x25.

Serial Port for Out-of-Band Management

These settings control the ACPI serial port redirection table (SPCR) which is used by Windows servers to provide Windows Emergency Management Services (EMS) and is independent from console redirection output. OoB Management or EMS allows the remote management of selected components of Windows servers, even when a server is not connected to the network or the network is not available

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Advanced
Out-of-Band Mgmt Port [COM0]
Terminal Type [VT-UTF8]
Bits per second [115200]
Flow Control [None]
Data Bits 8
Parity None
Stop Bits 1
Microsoft Windows Emergency Management Services (EMS) allows for remote management of a Windows Server OS through a serial port.
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

Terminal Type

VT-UTF8 is the preferred terminal type for out-of-band management. The next best choice is VT100+ and then VT100. See above, in Console Redirection Settings page, for more Help with Terminal Type/Emulation. Options: **VT100, VT100+, VT-UTF8, ASNI.**

Bits per second

Select the bits per second you want the serial port to use for console redirection. The options are 115200, 57600, 38400, 19200, 9600.

Flow Control

Set this option to select Flow Control for console redirection. The settings for this value are None, Hardware RTS/CTS.

Data Bits

Displays the frame width for Out-of-Band Management.

Parity

Displays the parity for Out-of-Band Management.

Stop Bits

Displays the number of stop bits for Out-of-Band Management.

5.4 Chipset Setup

Select the Chipset tab from the setup screen to enter the Chipset BIOS Setup screen. You can select any of the items in the left frame of the screen to go to the sub menu for that item. The Chipset BIOS Setup screen is shown below.

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main Advanced Chipset Boot Security Save & Exit
> Graphic & Memory Bridge
> PCH Bridge
> ME Subsystem
North Bridge Parameters
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

5.4.1 Graphics and Memory Bridge Configuration

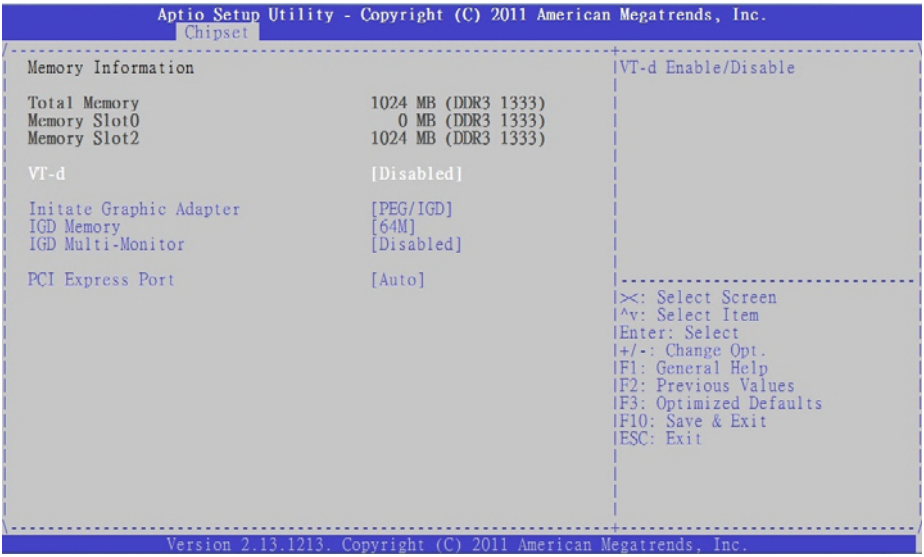

VT-d

Intel Virtualization Technology for Directed I/O. Options: Enabled/ Disabled.

Initial Graphics Adapter

Allows you to select which graphics controller to use as the primary boot device. Options: IGD, PCI/IGD, PCI/PEG, PEG/IGD, PEG/PCI.

IGD Memory

IGD shared memory size, Options: Disable/32M/64M/128M.

IGD Multi-Monitor

Multi-monitor support by the Internal Graphics Device. Options: Enabled/Disabled

PCI Express Port

This option enables auto negotiation with a PEG device, disables the use of the PEG port, or select enables use of the PEG port

5.4.2 PCH Bridge Configuration

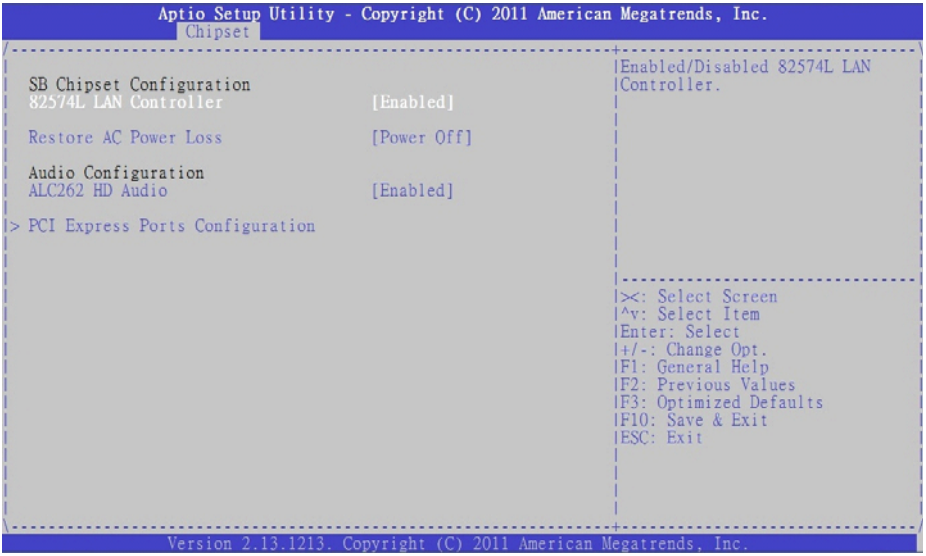

82574L LAN Controller

Controls the onboard Intel 82574L LAN controller. Options: Enabled/Disabled.

Restore on AC Power Loss

Determines which state the computer enters when AC power is restored after a power loss. The options for this value are Last State, Power On and Power Off.

- **Power Off:** Set this value to always power off the system while AC power is restored.
- **Power On:** Set this value to always power on the system while AC power is restored.
- **Last State:** Set this value to power off/on the system depending on the last system power state while AC power is restored.

ALC626 HD Audio

Set this value to Enable/Disable the HD Audio Controller.

PCI Express Port Configuration

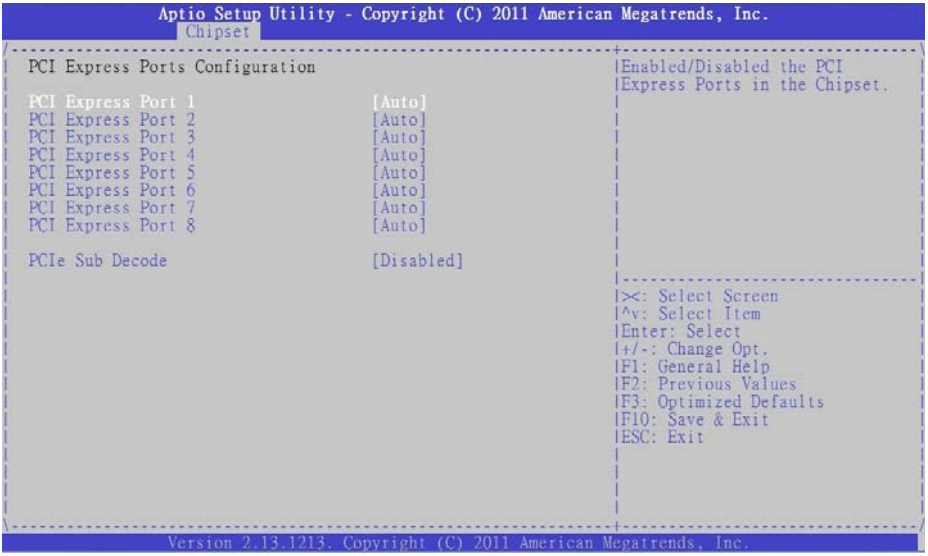
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Chipset
PCI Express Ports Configuration
PCI Express Port 1 [Auto]
PCI Express Port 2 [Auto]
PCI Express Port 3 [Auto]
PCI Express Port 4 [Auto]
PCI Express Port 5 [Auto]
PCI Express Port 6 [Auto]
PCI Express Port 7 [Auto]
PCI Express Port 8 [Auto]
PCIe Sub Decode [Disabled]
Enabled/Disabled the PCI Express Ports in the Chipset.
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

PCI Express Port 1~8

The Configure the PCI Express Ports in of the chipset. Configuration options:Options: Auto, Enable, Disable.

PCIe Sub Decode

Enabled or Disabled the PCIe Sub Decode Pport. This option is available when Subtractive Decode Agent Enable (PCHTrap9[14]) = '1b'.

5.4.3 Management Engine Subsystem

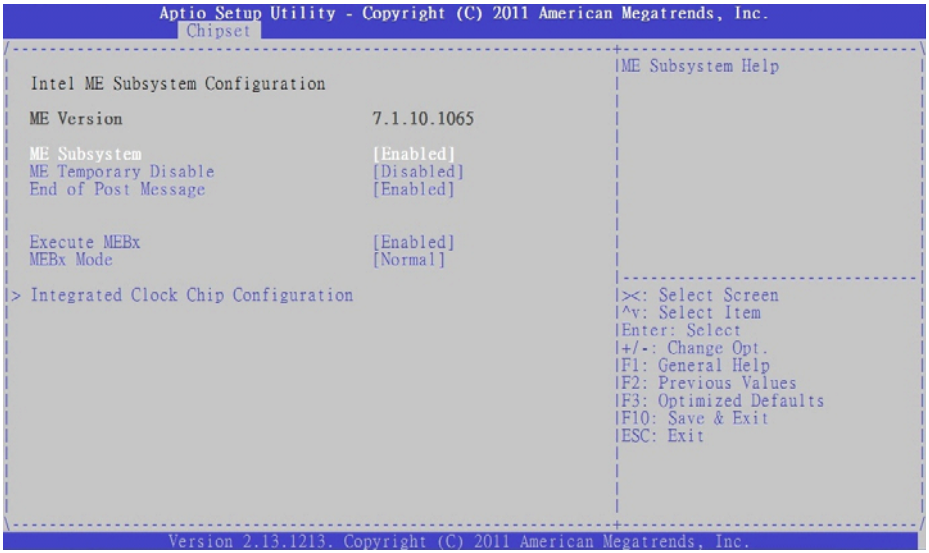

ME Subsystem

Options: Enabled/Disabled.

ME Temporary Disable

Options: Enabled/Disabled (reset required).

End of POST Message

Options: Enabled/Disabled.

Execute MEBx

Options: Enabled/Disabled.

MEBx Mode

Options: Normal, Hidden Ctrl+P, Enter MEBx setup.

Integrated Clock Chip Configuration

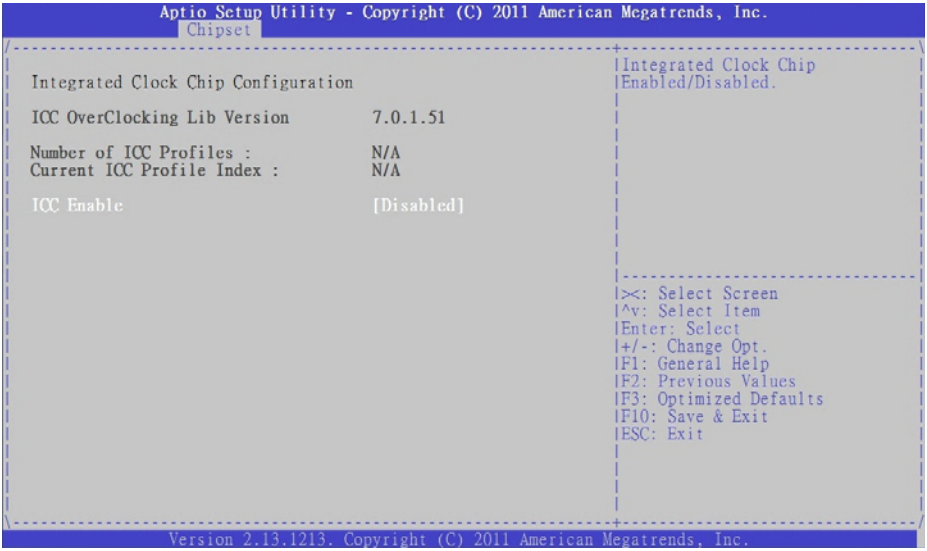
Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Chipset
Integrated Clock Chip Configuration
ICC OverClocking Lib Version 7.0.1.51
Number of ICC Profiles : N/A
Current ICC Profile Index : N/A
ICC Enable [Disabled]
Integrated Clock Chip Enabled/Disabled.
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

ICC Enable

Integrated Clock Chip. Options: Enabled/Disabled.

5.5 Boot Configuration

Select the Boot tab from the setup screen to enter the Boot BIOS Setup screen. You can select any of the items in the left frame of the screen, such as Boot Device Priority, to go to the sub menu for that item. You can display a Boot BIOS setup option by highlighting it using the < Arrow > keys. The Boot Configuration screen is shown below:

Setup Prompt Timeout

Number of seconds to wait for setup activation. 65535 (0xFFFF) means wait indefinitely.

Bootup NumLock State

This setting determines the state of the NumLock function on bootup. Options: On, Off.

Quiet Boot

When this feature is enabled, the BIOS will display the full-screen logo during the boot-up sequence, hiding normal POST messages.

When it is disabled, the BIOS will display the normal POST messages, instead of the full-screen logo.

Gate A20 Active

Options: Upon Request, Always.

Boot Option Priorities

Set the boot device options to determine the sequence in which the computer checks which device to boot from.

Hard Drive BBS Priorities

The Boot devices are listed in groups by device type. First press <Enter> to enter the sub-menu. You may then use the arrow keys to select the desired device, then press <+>, <-> or <PageUp>, <PageDown> key to move it up/down in the priority list. For example, USB storage disks will be listed as "USB Drives" in the sub-menu. Only the first device in each device gr

5.6 Security Setup

Aptio Setup Utility - Copyright (C) 2011 American Megatrends, Inc.
Main Advanced Chipset Boot Security Save & Exit
Password Description
If ONLY the Administrator's password is set, then this only limits access to Setup and is only asked for when entering Setup.
If ONLY the User's password is set, then this is a power on password and must be entered to boot or enter Setup. In Setup the User will have Administrator rights.
The password must be 3 to 20 characters long.
Administrator Password
User Password
Set Setup Administrator Password
><: Select Screen
^v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F10: Save & Exit
ESC: Exit
Version 2.13.1213. Copyright (C) 2011 American Megatrends, Inc.

Password Support

Two Levels of Password Protection

Provides both a Supervisor and a User password. If you use both passwords, the Supervisor password must be set first.

The system can be configured so that all users must enter a password every time the system boots or when Setup is executed, using either or either the Supervisor password or User password.

The Supervisor and User passwords activate two different levels of password security. If you select password support, you are prompted for a one to six character password. Type the password on the keyboard. The password does not appear on the screen when typed. Make sure you write it down. If you forget it, you must drain NVRAM and re-configure.

Remember the Password

Keep a record of the new password when the password is changed. If you forget the password, you must erase the system configuration information in NVRAM.

To access the sub menu for the following items, select the item and press < Enter >:

- Change Administrator Password
- Change User Password
- Clear User Password

Administrator Password

Indicates whether a Administrator password has been set.

User Password

Indicates whether a user password has been set.

5.7 Exit Menu

Select the Exit tab from the setup screen to enter the Exit BIOS Setup screen. You can display an Exit BIOS Setup option by highlighting it using the < Arrow > keys. The Exit BIOS Setup screen is shown below.

Save Changes and Exit

When you have completed the system configuration changes, select this option to leave Setup and reboot the computer so the new system configuration parameters can take effect.

Save Configuration Changes and Exit Now?

[Ok] [Cancel]

appears in the window. Select Ok to save changes and exit.

Discard Changes and Exit

Select this option to quit Setup without making any permanent changes to the system configuration.

Discard Changes and Exit Setup Now?

[Ok] [Cancel]

appears in the window. Select Ok to discard changes and exit.

Save Changes and Reset

Reset the system after saving the changes.

Discard Changes and Reset

Reset system setup without saving any changes.

Save Changes

Save changes made so far to any of the setup options.

Discard Changes

Select Discard Changes from the Exit menu and press < Enter >.

Select OK to discard changes.

Restore Defaults

Restore/Load Default values for all the setup options.

Save as User Defaults

Save the changes made so far as User Defaults.

Restore User Defaults

Restore the User Defaults to all the setup options.

Boot Override

This group of functions includes a list of devices within the boot order. Select a drive to immediately boot that device regardless of the current boot order. If you are booting to the EFI Shell, an exit from the shell returns to Setup.

Appendix A - Watchdog Timer

A sample program for configuring the NuPRO-E340's watchdog timer is included on the ADLINK All-in-One DVD in the following directory: **\NuPRO\NuPRO-E340\WDT**.

A.1 Sample Code

```
#include<stdio.h>
#include<dos.h>

static unsigned int IT8783_ioPort = 0x2e;

void Enter_IT8783_Config(unsigned int flag)
{
   if(flag) IT8783_ioPort = 0x4e;

   switch(IT8783_ioPort)
   {
      case 0x2E:  //Address port = 0x2E, enter keys =
      0x87, 0x01, 0x55, 0x55
         outportb(0x2E, 0x87);
         outportb(0x2E, 0x01);
         outportb(0x2E, 0x55);
         outportb(0x2E, 0x55);
         break;
      case 0x4E:  //Address port = 0x4E, enter keys =
      0x87, 0x01, 0x55, 0xAA
         outportb(0x4E, 0x87);
         outportb(0x4E, 0x01);
         outportb(0x4E, 0x55);
         outportb(0x4E, 0xAA);
         break;
      default:
         break;
   }
}

void Exit_IT8783_Config(unsigned int flag)
{
   if(flag) IT8783_ioPort = 0x4e;

   outportb(IT8783_ioPort, 0x02);
   outportb(IT8783_ioPort+1, 0x02);
```

```
}

void Get_IT8783_ID(unsigned int &ID1, unsigned int &ID2)
{
   outportb(IT8783_ioPort, 0x20);
   ID1 = inportb(IT8783_ioPort+1);
   outportb(IT8783_ioPort, 0x21);
   ID2 = inportb(IT8783_ioPort+1);
}


void IT8783_WDTRun(unsigned int count_value, unsigned int
     PLEDflag)   //for NuPRO-E340
{
   unsigned long tempCount;
   unsigned int registerValue;


   outportb(IT8783_ioPort, 0x07);
   outportb(IT8783_ioPort+1, 0x07);// Device 7

   outportb(IT8783_ioPort, 0xf8);
   outportb(IT8783_ioPort+1, 0x00);// PLED mapping to
      nothing, disable PLED function

   if(PLEDflag == 1)
   {
      outportb(IT8783_ioPort, 0x27);
      registerValue = inportb(IT8783_ioPort + 1);
      registerValue |= 0x80;  // set Pin09 is GPIO
      function GP37
      outportb(IT8783_ioPort+1, registerValue);

      outportb(IT8783_ioPort, 0xc2);
      registerValue = inportb(IT8783_ioPort + 1);
      registerValue &= 0x7fb; // set GP37 is alternate
      function
      outportb(IT8783_ioPort+1, registerValue);

      outportb(IT8783_ioPort, 0xca);
      registerValue = inportb(IT8783_ioPort + 1);
      registerValue |= 0x80;  // set GP42 is output
      outportb(IT8783_ioPort+1, registerValue);
```

```
   outportb(IT8783_ioPort, 0xf8);
   outportb(IT8783_ioPort+1, 0x1f);// PLED mapping to
   GP37

   outportb(IT8783_ioPort, 0xf9);
   registerValue = inportb(IT8783_ioPort + 1);
   registerValue |= 0x02;
   registerValue &= 0xfb;
   outportb(IT8783_ioPort+1, registerValue);
}

outportb(IT8783_ioPort, 0x71);
registerValue = inportb(IT8783_ioPort + 1);
registerValue &= 0xfe;
outportb(IT8783_ioPort+1, registerValue);

outportb(IT8783_ioPort, 0x72);
registerValue = inportb(IT8783_ioPort + 1);
registerValue &= 0xdf;
outportb(IT8783_ioPort+1, registerValue);

if(count_value >= 60)
{
   outportb(IT8783_ioPort, 0x72);
   registerValue = inportb(IT8783_ioPort+1);
   registerValue &= 0x8f;
   registerValue |= 0x40; //enable WDT output through
   PRST
   outportb(IT8783_ioPort+1, registerValue); // set
   WDT count is minute

   tempCount = count_value / 60;
   if((count_value%60) > 30)
      tempCount++;
   if(tempCount > 65535)
      tempCount = 65535;
   printf("WDT timeout in %d minutes.\n", tempCount);
}
else
{
   outportb(IT8783_ioPort, 0x72);
```

```
        registerValue = inportb(IT8783_ioPort+1);
        registerValue |= 0x80;

        tempCount = count_value;
        if(tempCount != 0)
        {
           printf("WDT timeout in %d seconds.\n",
        tempCount);
           registerValue |= 0x40; //Enable WDT output
        through KBRST
        }
        else
        {
           printf("WDT is Disabled.\n");
           registerValue &= 0xbf; //Disable WDT output
        through KBRST
        }

        outportb(IT8783_ioPort+1, registerValue); // set
        WDT count is second
     }

     outportb(IT8783_ioPort, 0x71);
     registerValue = inportb(IT8783_ioPort + 1);
     registerValue |= 0x60;  // set Mouse & Keyboard
        interrupt Enable
     outportb(IT8783_ioPort+1, registerValue);

     outportb(IT8783_ioPort, 0x73);
     outportb(IT8783_ioPort+1, tempCount); // set WDT count
        LSB

  }
```

Appendix B - System Resources

B.1 System Memory Map

Address Range (decimal)	Address Range (hex)	Size	Description
(4GB-2MB)	FFE00000 – FFFFFFFF	2 MB	High BIOS Area
(4GB-18MB) – (4GB-17MB-1)	FEE00000 – FEEFFFFF	1 MB	FSB Interrupt Memory Space
(4GB-20MB) – (4GB-19MB-1)	FEC00000 – FECFFFFF	1 MB	APIC Configuration Space
960 K – 1024 K	F0000 – FFFFF	64 KB	System BIOS Area
896 K – 960 K	E0000 – EFFFF	64 KB	Extended System BIOS Area
768 K – 896 K	C0000 – DFFFF	128 KB	PCI expansion ROM area C0000 – C7FFF: Onboard VGA BIOS CB800 – CC7FFF: Intel 82577LM PXE option ROM when onboard LAN boot ROM is enabled.
640 K – 768 K	A0000 – BFFFF	128 KB	Video Buffer & SMM space
0 K – 640 K	00000 – 9FFFF	640 KB	DOS Area

Table B-1: System Memory Map

B.2 Direct Memory Access Channels

Channel Number	Data Width	System Resource
0	8-bits	Parallel port(1)
1	8-bits	Parallel port(1)
2	8-bits	Diskette drive(1)
3	8-bits	Parallel port(1)
4		Reserved - cascade channel
5	16-bits	Open
6	16-bits	Open
7	16-bits	Open

Table B-2: Direct Memory Access Channels

Note (1): DMA channel 0, 1, or 3 will be occupied when using the parallel port.

B.3 IO Map

Hex Range	Device
000-01F	DMA controller 1, 8237A-5 equivalent
020-02D and 030-03F	Interrupt controller 1, 8259 equivalent
02E-02F,04E-04F	LPC SIO (ITE8783) configuration index/data registers
040-042, 050-052	Timer, 8254-2 equivalent
060, 062, 064, 066	8742 equivalent (keyboard)
061	NMI control and status
070-077	Real Time Clock Controller (bit 7 -NMI mask)
080-091	DMA page register
092	Reset (Bit 0)/ Fast Gate A20 (Bit 1)
093-09F	DMA page registers continued
0A0-0B1 and 0B4-0BD	Interrupt controller 2, 8259 equivalent
0C0-0DF	DMA controller 2, 8237A-5 equivalent
0F0	Read: PCI and Master abort. (Note 1) Write: FERR#/ IGNNE# /Interrupt controller
2E0 - 2F7	Serial Port 6
2E8 – 2EF	Serial Port 4
2F0 – 2F7	Serial Port 5
2F8 – 2FF	Serial Port 2
170-177 and 1F0-1F7 376 and 3F6	SATA controller or PCI
378 - 37F	Parallel port
3B0 – 3BB	Mono/VGA mode video
3C0- 3DF	VGA registers
3E8 – 3EF	Serial Port 3
3F8 – 3FF	Serial Port 1
4D0 and 4D1	Interrupt controller
400 – 47F	SB PM Base Address
500 – 57F	SB GPIO
A00 – A3F	SIO PME Base Address
CF9	Reset Control register (8 bit I/O)
1180 – 119F	SMBus

Table B-3: IO Map

Note: A read to this address will subtractively go to PCI, where it will master abort.

B.4 Interrupt Request (IRQ) Lines

IRQ Lines PIC Mode

IRQ#	Typical Interrupt Resource	Connected to Pin	Available
0	Counter 0	N/A	No
1	Keyboard controller	N/A	No
2	Cascade interrupt from slave PIC	N/A	No
3	Serial Port 2 (COM2)	IRQ3 via SERIRQ, IRQ3 at ISA bus	Note (1)
4	Serial Port 1 (COM1) / PCI / ISA	IRQ4 via SERIRQ, IRQ4 at ISA bus	Note (1)
5	PCI / ISA	IRQ5 via SERIRQ, IRQ5 at ISA bus	Note (1)
6	N/A	N/A	No
7	PCI / ISA	IRQ7 via SERIRQ, IRQ7 at ISA bus	Note (1)
8	Real-time clock	N/A	No
9	SCI / PCI	IRQ9 via SERIRQ, IRQ9 at ISA bus	Note (1), (2)
10	PCI / ISA	N/A	No
11	PCI / ISA	N/A	No
12	PS/2 Mouse / PCI / ISA	IRQ12 via SERIRQ, IRQ12 at ISA bus	Note (1)
13	Math Processor	N/A	No
14	Primary IDE controller / PCI / ISA	IRQ14 via SERIRQ, IRQ14 at ISA bus	Note (1)
15	PCI / ISA	N/A	No

Table B-4: IRQ Lines PIC Mode

Notes:

(1) These IRQs can be used for PCI devices when the onboard device is disabled. If the IRQ is from ISA, the user must reserve the IRQ for ISA in the BIOS setup menu.

(2) The BIOS does not open the IRQ 9 setting for the ISA bus.

IRQ Lines APIC Mode

IRQ#	Typical Interrupt Resource	Connected to Pin	Available
0	System Timer	N/A	No
1	Keyboard controller	N/A	No
2	PCI / ISA	N/A	No
3	Serial Port 2 (COM2) / PCI / ISA	IRQ3 via SERIRQ, IRQ3 at ISA bus	Note (1)
4	Serial Port 1 (COM1) / PCI / ISA	IRQ4 via SERIRQ, IRQ4 at ISA bus	Note (1)
5	Serial Port 3 (COM3) / PCI / ISA	IRQ5 via SERIRQ, IRQ5 at ISA bus	Note (1)
6	Serial Port 4 (COM4) / PCI / ISA	IRQ6 via SERIRQ	No
7	Parallel Port / Serial Port 5 (COM5) / PCI / ISA	IRQ7 via SERIRQ, IRQ7 at ISA bus	Note (1)
8	Real-time clock	N/A	No
9	ACPI-Compliant system	IRQ9 via SERIRQ, IRQ9 at ISA bus	Note (1), (2)
10	PCI / ISA	IRQ10 via SERIRQ, IRQ10 at ISA bus	Note (1)
11	Serial Port 6 /PCI / ISA	IRQ11 via SERIRQ, IRQ11 at ISA bus	Note (1)
12	PS/2 Mouse / PCI / ISA	IRQ12 via SERIRQ, IRQ12 at ISA bus	Note (1)
13	Math Processor	N/A	No
14	Primary IDE controller / PCI / ISA	IRQ14 via SERIRQ, IRQ14 at ISA bus	Note (1)
15	Secondary IDE controller / PCI / ISA	IRQ15 via SERIRQ, IRQ15 at ISA bus	Note (1)
16	N/A	PCIE Port 0/1/2/3/4/5/6/7, P.E.G. Root Port, I.G.D, EHCI Controller #2, MEI Controller.	Yes
17	N/A	PCIE Port 0/1/2/3/4/5/6/7, P.E.G. Root Port, KT Controller	Yes

IRQ#	Typical Interrupt Resource	Connected to Pin	Available
18	N/A	PCIE Port 0/1/2/3/4/5/6/7, P.E.G. Root Port, SATA Host controller, SMBus Controller, Thermal Controller, SOL (COM7)	Yes
19	N/A	PCIE Port 0/1/2/3/4/5/6/7, P.E.G. Root Port, SATA Host controller, SATA Host controller#1,	Yes
20	N/A	PCH internal GBE controller, PCI Slot 3	No
21	N/A	PCI Slot 0, PCI Slot 4	No
22	N/A	PCH HDA, PCI Slot 1	No
23	N/A	EHCI Controller #1, PCI Slot 2	No

Table B-5: IRQ Lines APIC Mode

Notes:

(1) These IRQs can be used for PCI devices when the onboard device is disabled. If the IRQ is from ISA, the user must reserve the IRQ for ISA in the BIOS setup menu.

(2) The BIOS does not open the IRQ 9 setting for the ISA bus.

PCI Configuration Space Map

Bus #	Device #	Function #	Routing	Description
00h	00h	00h	N/A	Intel Host Bridge
00	02H	00H	Internal	Intel IGD
02	00H	0FFH	N/A	P.E.G. Port
00h	02h	00h	Internal	Intel Integrated Graphics Device
00h	16h	00h	Internal	Intel Management Engine Interface #1
00h	16h	01h	Internal	Intel Management Engine Interface #2
00h	16h	02h	Internal	IDE-R controller
00h	16h	03h	Internal	PCI Serial controller
00h	19h	00h	Internal	GbE Controller
00h	1Ah	00h	Internal	Intel USB EHCI Controller #2
00h	1Bh	00h	Internal	High Definition Audio controller
00h	1Ch	00h	Internal	PCI Express Root port 1
00h	1Ch	01h	Internal	PCI Express Root port 2
00h	1Ch	02h	Internal	PCI Express Root port 3
00h	1Ch	03h	Internal	PCI Express Root port 4
00h	1Ch	04h	Internal	PCI Express Root port 5
00h	1Ch	05h	Internal	PCI Express Root port 6
00h	1Ch	06h	Internal	PCI Express Root port 7
00h	1Ch	07h	Internal	PCI Express Root port 8
00h	1Dh	00h	Internal	Intel USB EHCI Controller #1
00h	1Eh	00h	N/A	Intel PCI to PCI Bridge
00h	1Fh	00h	N/A	Intel LPC Interface Bridge
00h	1Fh	02h	Internal	Intel SATA controller #1
00h	1Fh	03h	Internal	Intel SMBus Controller
00h	1Fh	05h	Internal	Intel SATA controller #2
00h	1Fh	06h	Internal	Thermal Controller
11h	00h	0FFh	Internal	PCIE Port #0
12h	00h	0FFh	Internal	PCIE Port #1
13h	00h	0FFh	Internal	PCIE Port #2

Bus #	Device #	Function #	Routing	Description
14h	00h	0FFh	Internal	PCIE Port #3
15h	00h	0FFh	Internal	Intel 82574L LAN Controller
16h	00h	0FFh	Internal	PCIE Port #5
17h	00h	0FFh	Internal	USB 3.0 Controller
18h	00h	0FFh	Internal	PCIE Port #7
20h	0Fh	00h	Internal	PCI Slot 0
20h	0Eh	00h	Internal	PCI Slot 1
20h	0Dh	00h	Internal	PCI Slot 2
20h	0Ch	00h	Internal	PCI Slot 3
20h	0Bh	00h	Internal	PCI Slot 4

Table B-6: PCI Configuration Space Map

PCI Interrupt Routing Map

PIRQ	A	B	C	D	E	F	G	H
INT Line	INTA	INTB	INTC	INTD				
P.E.G. Root Port	INTA	INTB	INTC	INTD				
VGA	X							
SATA Controller			X	X				
SATA Controller 1				X				
SMBus controller			X					
Thermal Controller			X					
EHCI 1								X
EHCI 2	X							
HDA							X	
Intel GBE					X			
HECI host 1	X							
HECI host 2	X							
IDER Controller			X					
KT Controller		X						
PCIE port 0	INTA	INTB	INTC	INTD				
PCIE port 1	INTB	INTC	INTD	INTA				
PCIE port 2	INTC	INTD	INTA	INTB				
PCIE port 3	INTD	INTA	INTB	INTC				
PCIE port 4	INTA	INTB	INTC	INTD				
PCIE port 5	INTB	INTC	INTD	INTA				
PCIE port 6	INTC	INTD	INTA	INTB				
PCIE port 7	INTD	INTA	INTB	INTC				
PCI Slot 0						X		
PCI Slot 1							X	
PCI Slot 2								X
PCI Slot 3					X			
PCI Slot 4						X		

Table B-7: PCI Interrupt Routing Map

Important Safety Instructions

For user safety, please read and follow all **instructions**, **WARNINGS**, **CAUTIONS,** and **NOTES** marked in this manual and on the associated equipment before handling/operating the equipment.

- Read these safety instructions carefully.
- Keep this user's manual for future reference.
- Read the specifications section of this manual for detailed information on the operating environment of this equipment.
- When installing/mounting or uninstalling/removing equipment:
  - Turn off power and unplug any power cords/cables.
- To avoid electrical shock and/or damage to equipment:
  - Keep equipment away from water or liquid sources;
  - Keep equipment away from high heat or high humidity;
  - Keep equipment properly ventilated (do not block or cover ventilation openings);
  - Make sure to use recommended voltage and power source settings;
  - Always install and operate equipment near an easily accessible electrical socket-outlet;
  - Secure the power cord (do not place any object on/over the power cord);
  - Only install/attach and operate equipment on stable surfaces and/or recommended mountings; and,
  - If the equipment will not be used for long periods of time, turn off and unplug the equipment from its power source.

- Never attempt to fix the equipment. Equipment should only be serviced by qualified personnel.

A Lithium-type battery may be provided for uninterrupted, backup or emergency power.

Risk of explosion if battery is replaced with one of an incorrect type. Dispose of used batteries appropriately.

- Equipment must be serviced by authorized technicians when:
  - The power cord or plug is damaged;
  - Liquid has penetrated the equipment;
  - It has been exposed to high humidity/moisture;
  - It is not functioning or does not function according to the user's manual;
  - It has been dropped and/or damaged; and/or,
  - It has an obvious sign of breakage.

Getting Service

Contact us should you require any service or assistance.

ADLINK Technology, Inc.
Address: 9F, No.166 Jian Yi Road, Zhonghe District
New Taipei City 235, Taiwan
新北市中和區建一路 166 號 9 樓
Tel: +886-2-8226-5877
Fax: +886-2-8226-5717
Email: service@adlinktech.com

Ampro ADLINK Technology, Inc.
Address: 5215 Hellyer Avenue, #110, San Jose, CA 95138, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-360-0222
Email: info@adlinktech.com

ADLINK Technology (China) Co., Ltd.
Address: 上海市浦东新区张江高科技园区芳春路 300 号 (201203)
300 Fang Chun Rd., Zhangjiang Hi-Tech Park,
Pudong New Area, Shanghai, 201203 China
Tel: +86-21-5132-8988
Fax: +86-21-5132-3588
Email: market@adlinktech.com

ADLINK Technology Beijing
Address: 北京市海淀区上地东路 1 号盈创动力大厦 E 座 801 室(100085)
Rm. 801, Power Creative E, No. 1, B/D
Shang Di East Rd., Beijing, 100085 China
Tel: +86-10-5885-8666
Fax: +86-10-5885-8625
Email: market@adlinktech.com

ADLINK Technology Shenzhen
Address: 深圳市南山区科技园南区高新南七道 数字技术园
A1 栋 2 楼 C 区 (518057)
2F, C Block, Bldg. A1, Cyber-Tech Zone, Gao Xin Ave. Sec. 7,
High-Tech Industrial Park S., Shenzhen, 518054 China
Tel: +86-755-2643-4858
Fax: +86-755-2664-6353
Email: market@adlinktech.com

ADLINK Technology (Europe) GmbH
Address: Nord Carree 3, 40477 Duesseldorf, Germany
Tel: +49-211-495-5552
Fax: +49-211-495-5557
Email: emea@adlinktech.com

ADLINK Technology, Inc. (French Liaison Office)
Address: 15 rue Emile Baudot, 91300 Massy CEDEX, France
Tel: +33 (0) 1 60 12 35 66
Fax: +33 (0) 1 60 12 35 66
Email: france@adlinktech.com

ADLINK Technology Japan Corporation
Address: 〒101-0045 東京都千代田区神田鍛冶町 3-7-4
神田 374 ビル 4F
KANDA374 Bldg. 4F, 3-7-4 Kanda Kajicho,
Chiyoda-ku, Tokyo 101-0045, Japan
Tel: +81-3-4455-3722
Fax: +81-3-5209-6013
Email: japan@adlinktech.com

ADLINK Technology, Inc. (Korean Liaison Office)
Address: 서울시 서초구 서초동 1675-12 모인터빌딩 8 층
8F Mointer B/D,1675-12, Seocho-Dong, Seocho-Gu,
Seoul 137-070, Korea
Tel: +82-2-2057-0565
Fax: +82-2-2057-0563
Email: korea@adlinktech.com

ADLINK Technology Singapore Pte. Ltd.
Address: 84 Genting Lane #07-02A, Cityneon Design Centre,
Singapore 349584
Tel: +65-6844-2261
Fax: +65-6844-2263
Email: singapore@adlinktech.com

ADLINK Technology Singapore Pte. Ltd. (Indian Liaison Office)
Address: No. 1357, "Anupama", Sri Aurobindo Marg, 9th Cross,
JP Nagar Phase I, Bangalore - 560078, India
Tel: +91-80-65605817
Fax: +91-80-22443548
Email: india@adlinktech.com